EDGE 1 系列

IoT LPWA Solution - EDGE 1 Industrial LoRa Edge Node (Project base with quantity requirement)





產品介紹

EDGE series products are Internet of Things devices which speed up IoT project deployment on field sites in an easy and scalable way. The major advance wireless LPWA solution:LoRaWAN™ is deployed on the Edge node product respectively, fulfilling wireless monitoring
and controlling needs under an IoT framework.

The EDGE 1 deploys LoRaWAN™ wireless technology to provide field asset connectivity to AiR PACE Smart LoRa IoT Edge Computing Gateway with 4G LTE Backhaul & Network Server in low data rates over long distances.

EtherWAN — "**When Connectivity is Crucial.**"

影片

產品亮點

» Multiple I/O to connect to a Wide Variety of Field Equipment

» Integrated 10 bit A/D Converter to convert Analog Signal to Digital Data

» Serial port supports Modbus RTU Interoperability

» Battery or DC Power Input

» -30 to 70°C Temperature Range

» IP65 Enclosure Design

Frequency Bands

LoRa Communication Frequency Band

Models	Band Options	Regions
EDGE 1-EA	923-924MHz (AS923)*Japan, Vietnam Excluded	APAC (*Japan, Vietnam Excluded)
EDGE 1-EU	863-870MHz (EU868)*Europe, Vietnam	Europe, Vietnam

產品特色

WAN & Uplink

» EDGE 1

• Uplink: Support LoRa wireless data transmission capability, with standard LoRaWAN™ Protocol and Class A/C and self-organizing network capabilities

• Data Security: Supports LoRaWAN™ standard Encryption

Field Communication

» Modbus

• Windows Utility, Console CLI

Administration

» Configuration

• Windows Utility, Console CLI

產品規格

Wireless Interfaces

EDGE 1
• 1 x LoRa Module

Frequency Band
• 863-870MHz (EU/EU868), 923-924MHz (APAC/AS923)* Japan Excluded

Specification
• Max. Output Power: 14dBm (EU868), 20dBm (AS923)
• Sensitivity: -132dBm@980bps

I/O Interfaces

Analog Input
• 3 x AI ports (supports 0-10V/4-20mA)
• Conversion: 10bit ADC
• Input Range: 0-10V, or 4-20mA (Dual mode)
• Resolution: 10mV, or 20uA (with 2-bit hard-wired divider involved)

Digital Input
• 2 x DI ports (Isolated, supports Pulse Counter, Dry Contact)

Digital Output
• 1 x DO port (Isolated, Non-Relayed Output, Maximum 24V/300mA)

RS-485
• Support 8 sets Modbus RTU devices
• Modbus/RTU read command FC 1,2,3,4 and write command FC 5,6 from MQTT

I/O Connectors

• 2 x M16 waterproof connectors with 2-hole cable gland for wiring the required ports to external sensors/meters

Embedded Antennas

EDGE 1 Series
• 1 x Internal LoRa Antenna

Power

• 4000mAh 3.6V Li-SOCL2 battery (Optional), or external 5-12VDC Power Input predefined by Jumper

Mechanical

Casing

• Plastic (PC, UL-94V2)
• IP65

Dimension

• 105 x 55 x 76.47mm (W x D x H); Enclosure only
• 131.97 x 81 x 76.47mm (W x D x H); Including Cable Gland, Brackets

Weight

• 0.3Kg (0.66lbs)

Installation

• Bracket mounting

Environment Limits

Operating Temperature

• -30 to 70°C (-22 to 158°F)

Storage Temperature

• -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity

• 5% to 95% (non-condensing)

Regulatory Approvals


Safety

EN 60950-1

Emissions/Immunity


CE

應用圖

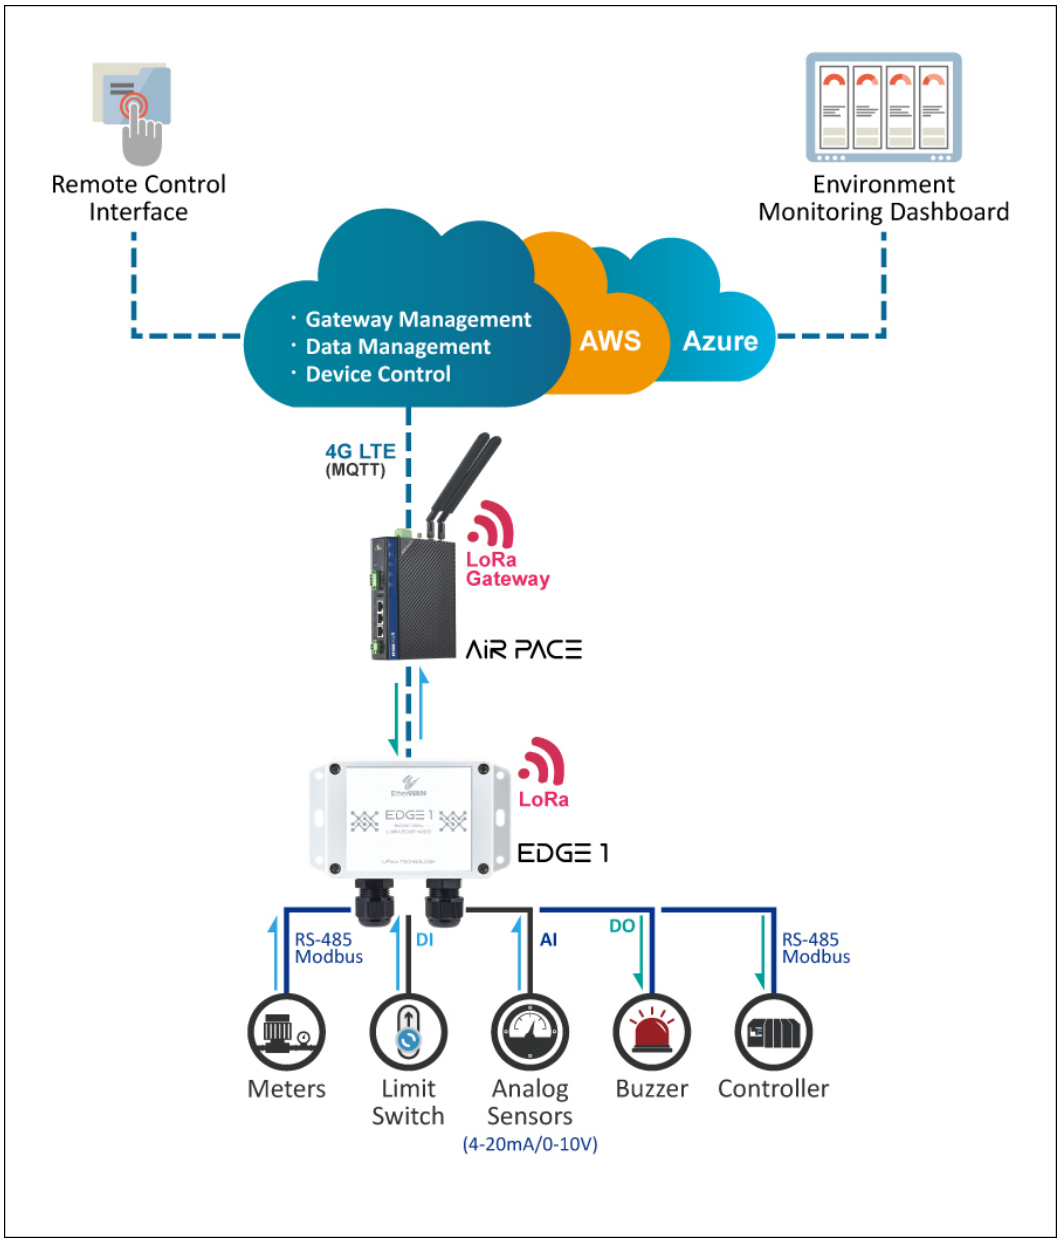
Remote Control Interface
Environment Monitoring Dashboard
· Gateway Management
· Data Management
· Device Control
AWS
Azure
4G LTE (MQTT)
LoRa Gateway
AIR PACE
LoRa
EDGE 1
RS-485 Modbus
DI
AI
DO
RS-485 Modbus
Meters
Limit Switch
Analog Sensors (4-20mA/0-10V)
Buzzer
Controller

產品尺寸圖

Image not found or type unknown

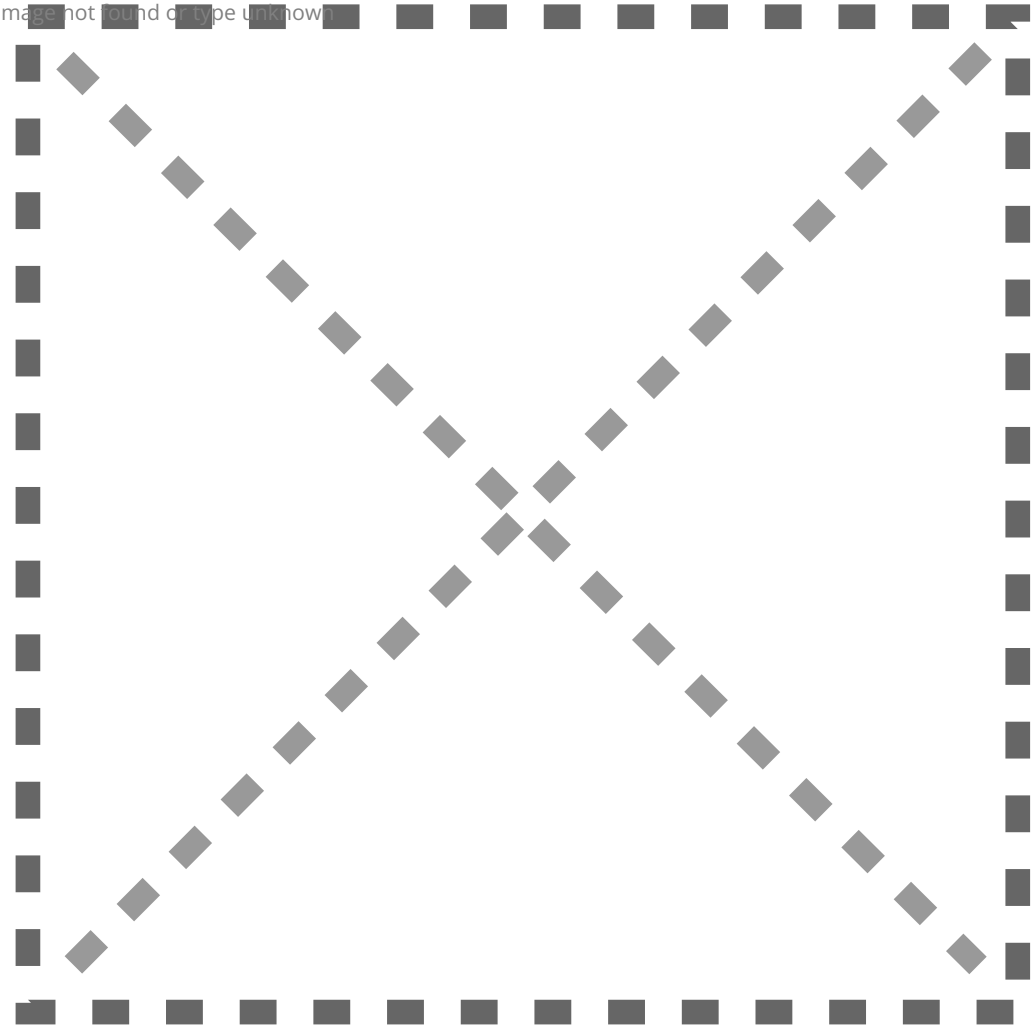

訂購型號

Model	Band/Channel	Regions
EDGE 1-EA	923-924MHz (AS923)	APAC (*Japan, Vietnam Excluded)
EDGE 1-EU	863-870MHz (EU868)	Europe, Vietnam

Included Accessories

- Device x 1
- Cable Tie for fixing battery x 2
- Jumper for AI current mode setting x 3
- Water & Dust-proof stopper x 3

Optional Accessory

USB-to-Serial Console Cable	Note	Note
Image not found or type u	W96G-11330Y100 ER18505-3.6V-4000mAh battery for EDGE 1 & EDGE 2 series.	

© EtherWAN Systems, Inc. All rights reserved. 20260107
EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.