

# EX17082A

Unmanaged 8-port 10/100BASE-TX PoE (IEEE802.3at)  
and 2-port combo Gigabit SFP Ethernet Switch



## Overview

EtherWAN's EX17082A provides a 10-port switching platform supporting IEEE802.3at Power over Ethernet, high performance switching with robust features required for small-business or enterprise environments where sustained connectivity is crucial.

The EX17082A is equipped with 8 10/100BASE-TX PoE ports, in combination with two Gigabit SFP ports. The EX17082A is feature rich with full wire speed throughput, making the EX17082A Series a powerful network switch.

The IEEE802.3at PoE ports provide up to 30W/port with a PoE power budget of 240W, making the switch truly versatile for connecting with PoE Powered Devices (PD) with different bandwidth and power consumption requirements such as; outdoor PTZ dome cameras, wireless access points, and way-side communication devices.

EtherWAN — "When Connectivity is Crucial."

## Spotlight

### • Power over Ethernet

- Supports 8-port IEEE802.3at Power over Ethernet (PoE) and Power Sourcing Equipment (PSE)

### • SFP Connectivity

- Built-in 2-port combo Gigabit SFP for either Gigabit copper or SFP connectivity

# Hardware Specifications

## Technology

---

### Standards

- IEEE802.3 10BASE-T
- IEEE802.3u 100BASE-TX/100BASE-FX
- IEEE802.3x full duplex and flow control
- IEEE802.3ab 1000BASE-TX
- IEEE802.3z 1000BASE-SX/LX
- IEEE802.3af/at Power over Ethernet

### Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps
- 1,488,100pps for 1000Mbps

### Packet Buffer Memory

- 2.75M bits

### Processing Type

- Store-and-Forward
- Half-duplex back-pressure and IEEE802.3x full-duplex flow control

### Address Table Size

- 4096 MAC addresses

## Power

---

### Input

- 100 to 240VAC, 50/60Hz

### Power Consumption

- Device: Max. 11W (without PoE)
- PoE Power Budget: 240W max.

### PoE Technology

- Alternative A  
Pins 1/2(+), 3/6(-)

### PoE Power Output

- IEEE802.3at: up to 30W/port, 50-57VDC, 600mA Max.

## Mechanical

---

### Casing

- Metal Case

### Dimensions

- 440mm (W) x 220mm (D) x 44mm (H)  
(17.6" (W) x 8.8" (D) x 1.76" (H))
- Standard 19" rack-mount size, one-unit-height

### Weight

- 3.1Kg (6.83lbs.)

### Installation

- Rack mounting

## Interface

---

### Ethernet Port

- 10/100BASE-TX: 8 PoE ports
- Gigabit: 2ports

### LED Indicators

- Per Unit: Power Status
- Per Port 10/100TX and 100FX: Link/Activity
- Per Port PoE: Act/status

## Environment

---

### Operating Temperature

- 0°C to 45°C (32°F to 113°F)

### Storage Temperature

- -10°C to 70°C (14°F to 158°F)

### Ambient Relative Humidity

- 10% to 90% (non-condensing)

## Regulatory Approvals

---

### ISO

- Manufactured in an ISO 9001 facility


### EMI

---

### CE Mark Class A

### FCC Part 15 Class A

## Dimensions

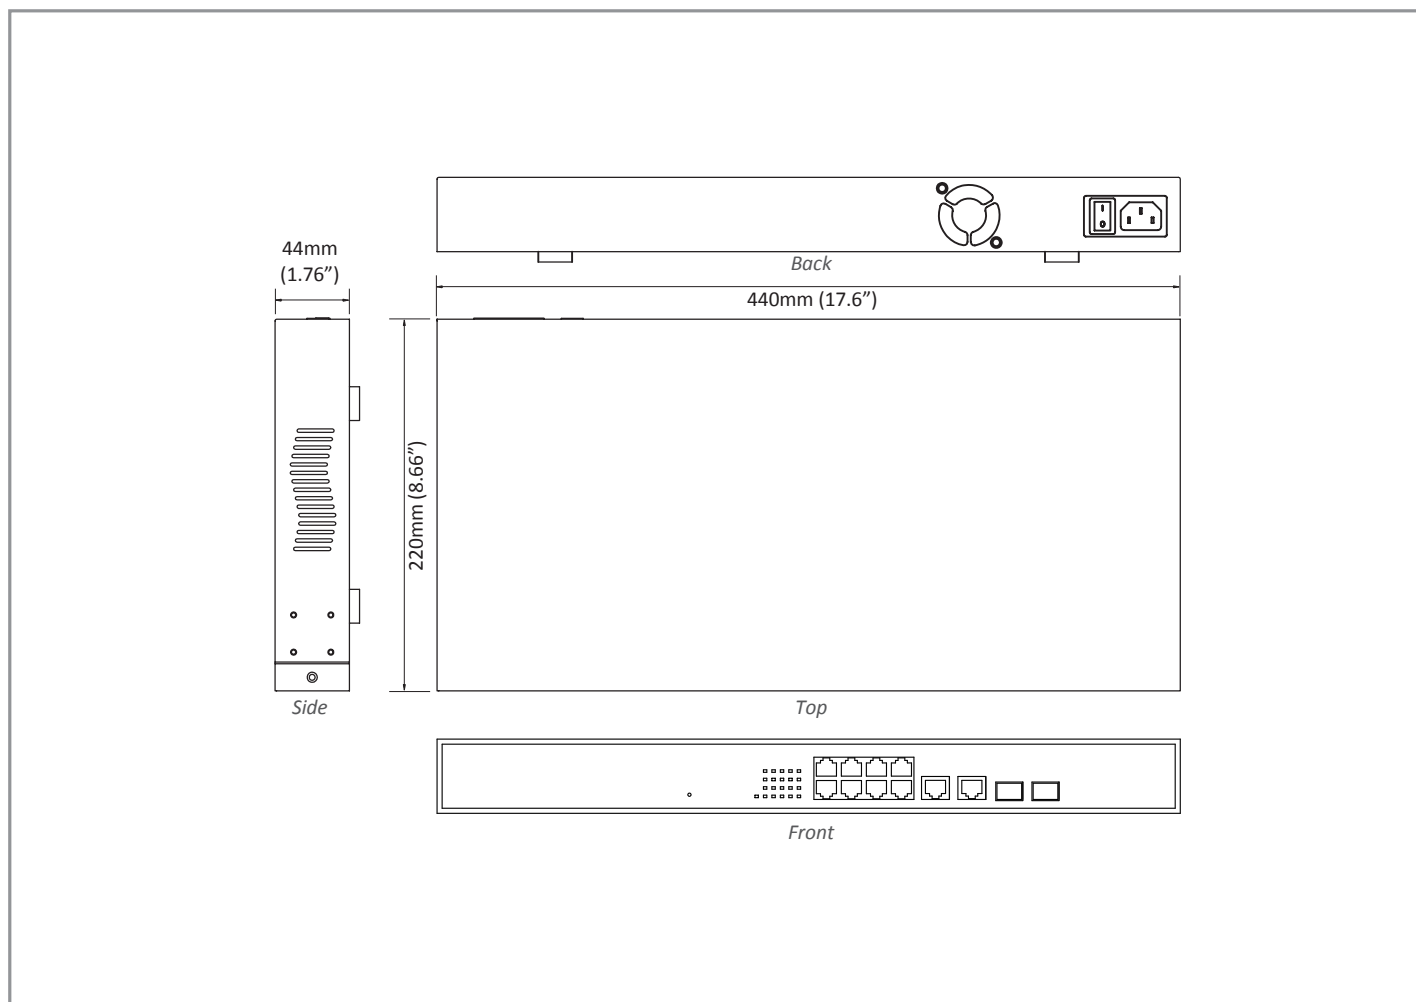

## Ordering Information

### Model

|                 |   |
|-----------------|---|
| <b>EX17082A</b> | Unmanaged 8-port 10/100BASE-TX PoE (IEEE802.3at) and 2-port combo Gigabit SFP Ethernet Switch |
|-----------------|---|

\* Rack mounting kit included