

EX17008A

非管理型 8ポート 10/100BASE-TX PoE (IEEE 802.3at) イーサネット スイッチ



概要

本商品につきましては2020年8月28日をもって販売を終了させて頂きました。代替製品については [こちらのページ](#) をご覧ください。

EtherWAN's EX17008A provides a 8-port switching platform supporting IEEE802.3at Power over Ethernet, high performance switching with features required for enterprise environments.

The EX17008A is equipped with 8 10/100BASE-TX PoE ports. The EX17008A is feature rich with full wire speed throughput, making the EX17008A Series a powerful network switch.

The IEEE802.3at PoE ports provide up to 30W/port with a PoE power budget of 120W, making the switch truly versatile for connecting with PoE Powered Devices (PD) with different bandwidth and power consumption requirements.

EtherWAN — "When Connectivity is Crucial."

特長

Power over Ethernet

- » Supports 8-port IEEE802.3at Power over Ethernet (PoE) and Power Sourcing Equipment (PSE)

Easy to Install

- » Plug-and-play operation

仕様

Technology

Standards

- IEEE802.3 10BASE-T
- IEEE802.3u 100BASE-TX/100BASE-FX
- IEEE802.3x Full duplex and flow control
- IEEE802.3af/at Power over Ethernet

Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps

Packet Buffer Memory

- 1.625Mbits

Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE802.3x full-duplex flow control
- Auto MDI/MDIX

Address Table Size

- 4K MAC addresses

Power

Input

- 100 to 240VAC, 50/60Hz

Power Consumption

- Device: Max. 5.8W (without PoE)
- PoE power budget: 120W Max.

PoE Technology

- Alternative A, Pins 1/2(+), 3/6(-)

PoE Power Output

- IEEE802.3at: up to 30W/port, 50 - 57VDC, 600mA Max.

Mechanical

Casing

- Metal Case

Dimensions

- 266 x 160 x 44mm (W x D x H)
(10.47" x 6.30" x 1.73")

Weight

- 1.4Kg (3.08lbs.)

Installation

- Desktop, Rack Mounting
-

Interface

Ethernet Port

- 10/100BASE-TX: 8 PoE ports

LED Indicators

- Per Unit: Power Status
 - Per Port: Link/Activity, PoE Act/status
-

Environment

Operating Temperature

- 0 to 45°C (32 to 113°F)

Storage Temperature

- -10 to 70°C (14 to 158°F)

Ambient Relative Humidity

- 10% to 95% (non-condensing)
-

Regulatory Approvals

ISO

- Manufactured in an ISO9001 facility

Safety


UL 60950

Emission Compliance

FCC Part 15 Class A

CE mark Class A

寸法図

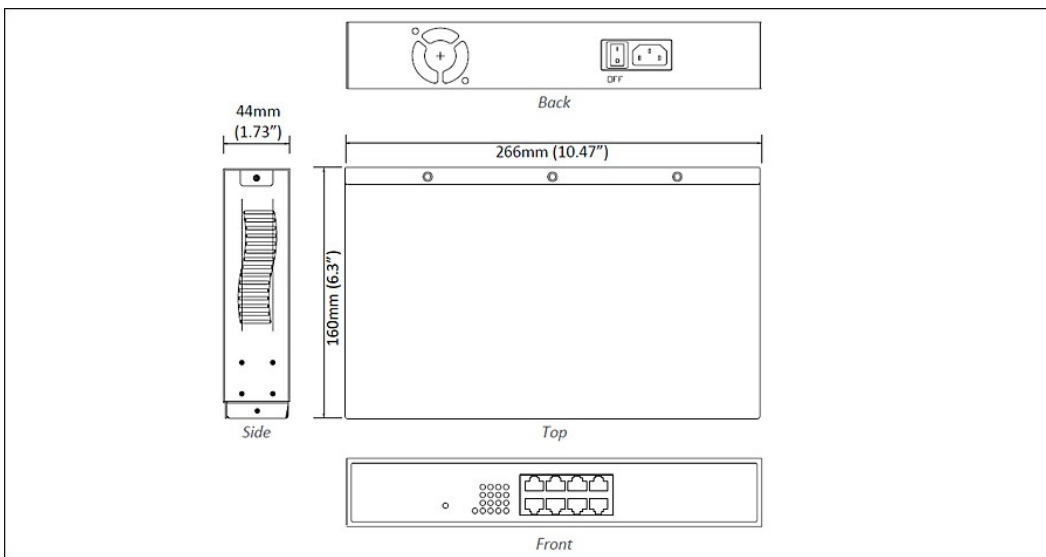

製品型番

Model

EX17008A	8-port 10/100BASE-TX PoE (IEEE802.3at) Unmanaged Ethernet Switch
----------	--

Optional Accessories

KR-BK17		Rack mounting kit (black)
---------	---	---------------------------



© EtherWAN Systems, Inc. All rights reserved. 20260107

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.