


# DIN-Rail 電源装置

産業用 電源装置 シリーズ

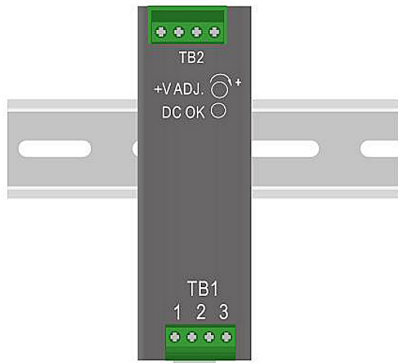

## 概要

### Stable Performance under Difficult Environments

EtherWAN provides DC single output industrial DIN rail power supply units come with such protection features as short circuit, overload, over voltage and over temperature for the stable operation of industrial Ethernet equipment. It uses the free air convection cooling system to prevent operating temperature from rising. Being able to operate under the temperature range from -20 to 70 degrees C (maximum), the DC single output industrial DIN rail power supply units can be placed in almost any difficult environments.

EtherWAN — "When Connectivity is Crucial."

## 製品型番

### + Model

| Model number       | Working Temperature | Input Voltage | Output Voltage | Description                                      | datasheet                 |
|--------------------|---------------------|---------------|----------------|--|---------------------------|
| <b>HDR-30-12</b>   | -30 ~ +70°C         | 85-264VAC     | 12VDC          | 30W/ 2A DIN Rail 12VDC Industrial Power Supply   | <a href="#">datasheet</a> |
| <b>HDR-30-24</b>   | -30 ~ +70°C         | 85-264VAC     | 24VDC          | 30W/1.5A DIN-Rail 24VDC Industrial Power Supply  | <a href="#">datasheet</a> |
| <b>HDR-60-24</b>   | -30 ~ +70°C         | 85-264VAC     | 24VDC          | 60W/2.5A DIN-Rail 24VDC Industrial Power Supply  | <a href="#">datasheet</a> |
| <b>EDR-75-24</b>   | -20 ~ +60°C         | 90-264VAC     | 24VDC          | 75W/3.2A DIN-Rail 24VDC Industrial Power Supply  | <a href="#">datasheet</a> |
| <b>EDR-75-48</b>   | -20 ~ +60°C         | 90-264VAC     | 48VDC          | 75W/1.6A DIN-Rail 48VDC Industrial Power Supply  | <a href="#">datasheet</a> |
| <b>EDR-120-24</b>  | -20 ~ +60°C         | 90-264VAC     | 24VDC          | 120W/5A DIN-Rail 24VDC Industrial Power Supply   | <a href="#">datasheet</a> |
| <b>EDR-120-48</b>  | -20 ~ +60°C         | 90-264VAC     | 48VDC          | 120W/2.5A DIN-Rail 48VDC Industrial Power Supply | <a href="#">datasheet</a> |
| <b>NDR-120-48</b>  | -20 ~ +70°C         | 90-264VAC     | 48VDC          | 120W/2.5A DIN-Rail 48VDC Industrial Power Supply | <a href="#">datasheet</a> |
| <b>NDR-240-48</b>  | -20 ~ +70°C         | 90-264VAC     | 48VDC          | 240W/5A DIN-Rail 48VDC Industrial Power Supply   | <a href="#">datasheet</a> |
| <b>NDR-480-48</b>  | -20 ~ +70°C         | 90-264VAC     | 48VDC          | 480W/10A DIN-Rail 48VDC Industrial Power Supply  | <a href="#">datasheet</a> |
| <b>DDR-120A-48</b> | -40 ~ +70°C         | 9-18VDC       | 48VDC          | 120W/2.1A DIN-Rail 48VDC Industrial Power Supply | <a href="#">datasheet</a> |
| <b>DDR-120B-48</b> | -40 ~ +70°C         | 16.8-33.6VDC  | 48VDC          | 120W/2.5A DIN-Rail 48VDC Industrial Power Supply | <a href="#">datasheet</a> |



© EtherWAN Systems, Inc. All rights reserved. 20240606

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.