

EX78000 シリーズ

広範囲動作温度対応産業用/管理型 10ポート 10/100BASE (8 x PoE) + 2ポート ギガビット イーサネット スイッチ



概要

本商品につきましては2026年8月6日をもって販売を終了させて頂きました。代替製品については [こちらのページ](#) をご覧ください。

EtherWANのEX78000は8個の10/100BASE PoEポートと2個の100BASE光ポート、そして2個のギガ光ポートを装備する最大12ポート運用が可能な産業用イーサネットスイッチです。その上、SX/LX/BX/WDM光ポートとSFPも選択でき、60WのPoEを搭載しており、様々な端末設備(PTZカメラ、無線アクセスポイント、通信デバイスなど)も備えています。

冗長化機能(STP/RSTP/MSTP)に対応し、リング構成の1ルートが遮断されても15ms以内で自動復帰するAlpha-RingというEtherWAN独自リングプロトコルを搭載。IPv4/IPv6プロトコルやポートセキュリティ、IGMPスヌーピング、VLANs、GARPプロトコルとリンク集合などの管理機能をブラウザ経由で設定可能。

Telnet、SNMP、RMON、TFTP、RS-232コンソールなどにも接続でき、過酷な環境でも中断なしの通信を提供できる堅牢な管理機能を備えています。また動作温度は-40～75℃広範囲に対応し、高い静電気(ESD)、ショックと振動及び電磁妨害(EMI)などの過酷な環境でもご使用いただけます。

EtherWAN — "When Connectivity is Crucial."

特長

+ Hardened-Grade for Non-Ventilated & Harsh Environments

Wide operating temperature range -40 to 75°C (-40 to 167°F)

Fanless operation

High impact, thermal shock, and electrical noise resistance

+ PoE Features

Up to 60W/port with 240W total power budget

Long distance PoE up to 250m (820ft)

PoE watchdog monitors status of connected PoE devices

+ Management/Security Features

Port control

802.1x port-based network access control and remote authentication through RADIUS

Configure and monitor with eVue™ and eLite™

+ Support

Complimentary Technical Support

Free Firmware Upgrades

Limited Lifetime Warranty

機能

+ Interface

CLI, Telnet, Web Browser
SNMP v1/v2c/v3

+ Management

Firmware and configuration upgrade and backup via TFTP
Supports DHCP Server/Client
RMON (Remote Monitoring): group 1, 2, 3, 9
Port Mirroring: TX/RX and both
NTP (Network Time Protocol) synchronization
IEEE 802.1ab LLDP (Link Layer Discovery Protocol)
IPv4/IPv6

+ Security

MAC Address Filtering
Enable/Disable port
Storm control (Broadcast and multicast types)
IEEE 802.1x LAN Access control
Remote authentication through RADIUS and TACACS+
Multi-user login and privileged access management
SSH for CLI and Telnet security
SSL for web security
System log (Remote/Local)
ACL

+ Quality of Service (QoS)

Priority Queues: 4 queues per port
Traffic classification based on IEEE 802.1p CoS, DSCP, WRR and strict mode
Rate Limiting (Ingress/Egress)

+ Layer 2 Features

Auto-negotiation for port speed and duplex mode

Flow Control
IEEE 802.3x Full duplex mode
Back-Pressure half duplex mode

Redundant Protocols

IEEE 802.1D STP
IEEE 802.1w RSTP
IEEE 802.1s MSTP
EtherWAN's Alpha-Ring network fault recovery (<15ms)

VLANs

IEEE 802.1Q Tag VLANs (128 groups, 4096 VID)
GVRP
GMRP

Link Aggregation

Static Trunk (2 groups, support MAC base)
IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

仕様

+ Interface

Ethernet

4 or 8 x 10/100BASE-T(X) (PoE)

0, 2 or 4 x 100BASE FX

2 x 100/1000BASE SFP Slot

2 x Gigabit

Console

1 x DB9 RS-232

Alarm Contact

1 x Relay output, current capacity 0.5A/48VDC

LED Indicators

Per Unit: Power 1, Power 2, Alarm

Per Port: Link/Activity (Green)

Per PoE Port: (Orange)

+ Technology

Standards

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX/100BASE-FX

IEEE 802.3ab 1000BASE-T

IEEE 802.3z 1000BASE-SX/1000BASE-LX

IEEE 802.3x Full duplex and flow control

IEEE 802.1p QoS

IEEE 802.1Q Tag VLANs

IEEE 802.1w RSTP

IEEE 802.1x PNAC

IEEE 802.3af/at/bt Power over Ethernet

Forward/Filtering Rate

14,880pps for 10Mbps

148,810pps for 100Mbps

1,488,100pps for 1000Mbps

Packet Buffer Memory

12M bits

Processing Type

Store-and-Forward

Auto-negotiation

Half-duplex back-pressure and IEEE 802.3x Full-duplex flow control

+ Environmental

Operating Temp.

-40 to 75°C (-40 to 167°F)

Tested @ -40 to 85°C (-40 to 185°F)

Storage Temp.

-45 to 85°C (-49 to 185°F)

Relative Humidity

5% to 95% (non-condensing)

+ Regulatory

ISO

Manufactured in ISO-9001 facility

EMI

FCC Part 15B Class A

VCCI Class A

EN 61000-6-4

EMS

EN 61000-6-2

EN 61000-4-2 (ESD)

EN 61000-4-3 (Radiated RFI)

EN 61000-4-4 (Burst)

EN 61000-4-5 (Surge)

EN 61000-4-6 (Induced RFI)

EN 61000-4-8 (Magnetic Field)

Safety

UL 61010

Vibration

IEC 60068-2-6 Fc

Shock

IEC 60068-2-27 Ea

Free Fall

FED STD 101C Method 5007.1

Industrial Compliance

NEMA TS2

+ Power

Input

52-57VDC Redundant (Terminal block)

Power Consumption

10.4W Max (without PoE)

Power Power Budget

240W Max.

PoE Technology

Alternative A & B

Pins 1/2(+), 3/6(-), Pins 7/8(-), 4/5(+)

Power Power Output

Port 1 to 8 support PoE+ (15.4W/30W/60W)

IEEE 802.3af: up to 15.4W/port, 47-57VDC

IEEE 802.3at: up to 30W/port, 52-57VDC; 60W/port, 52-57VDC

Protection

Reverse Polarity Protection

+ Physical

Casing Material

Metal

IP Rating

IP30

Dimensions

71.4 x 140 x 170mm (W x D x H)

2.85" x 5.6" x 6.8"

Weight

1.7kg (3.74lbs)

Installation Type

DIN-rail mounting

+ Warranty

Length

Limited Lifetime

Details

www.etherwan.com/support/warranty-policy

+ What's Included

Device

Ethernet Switch


Cables

1 Console Cable


Documentation

Quick Install Guide

寸法図

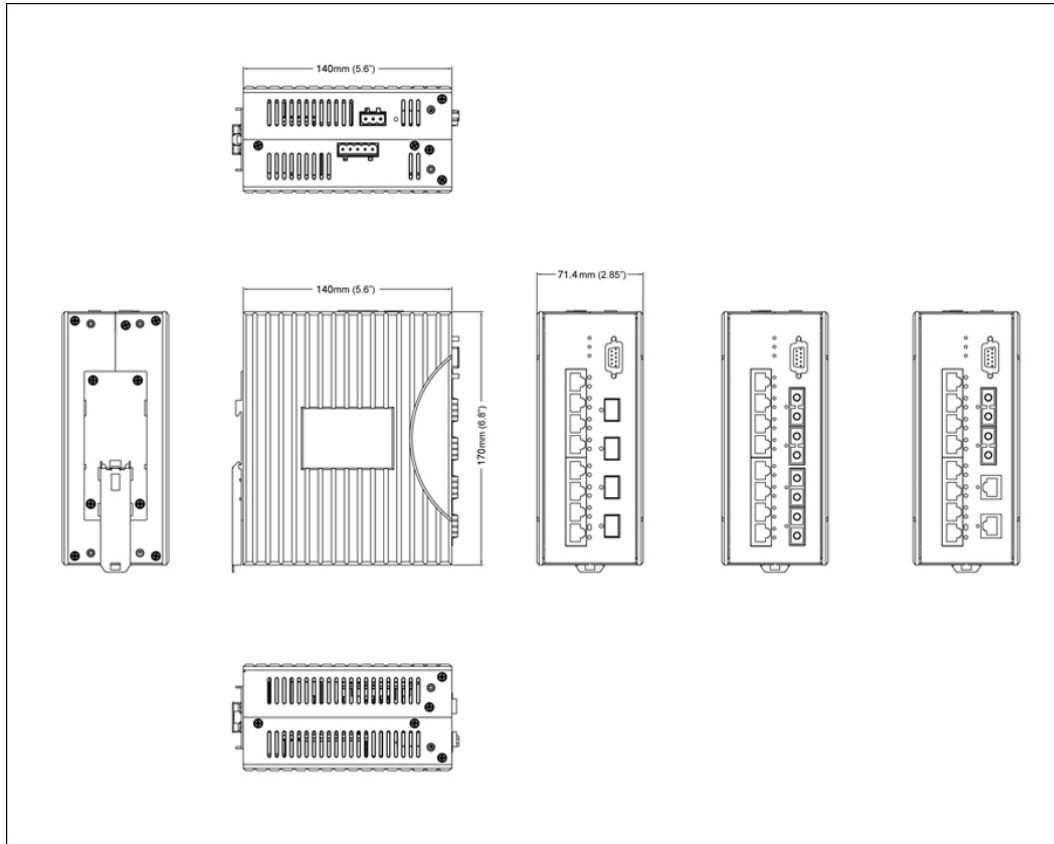

応用例

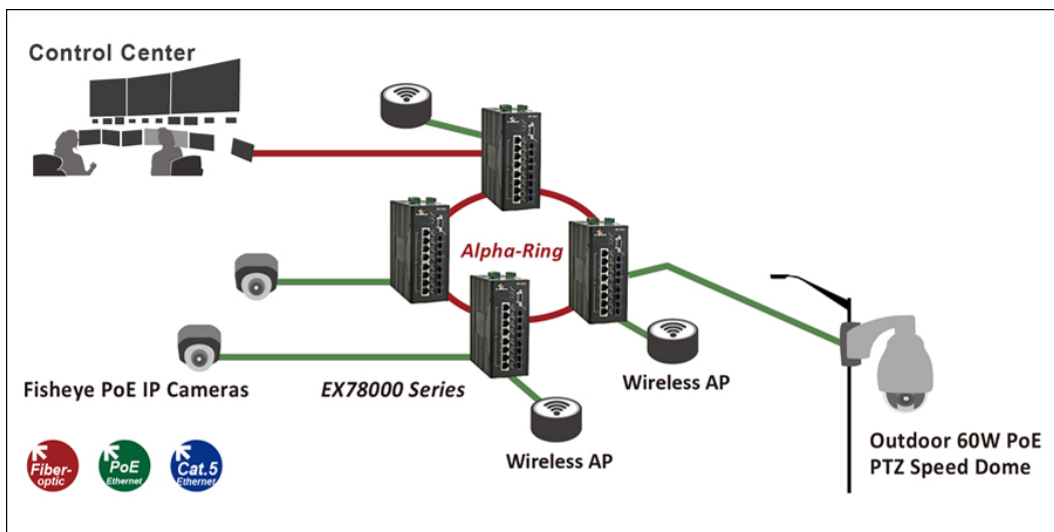


ソフトウェア

Network Management

[eVue™ Network Configuration and Monitoring Tool](#)

Network Discovery

[eLite™ Network Discovery and IP Configuration Tool](#)

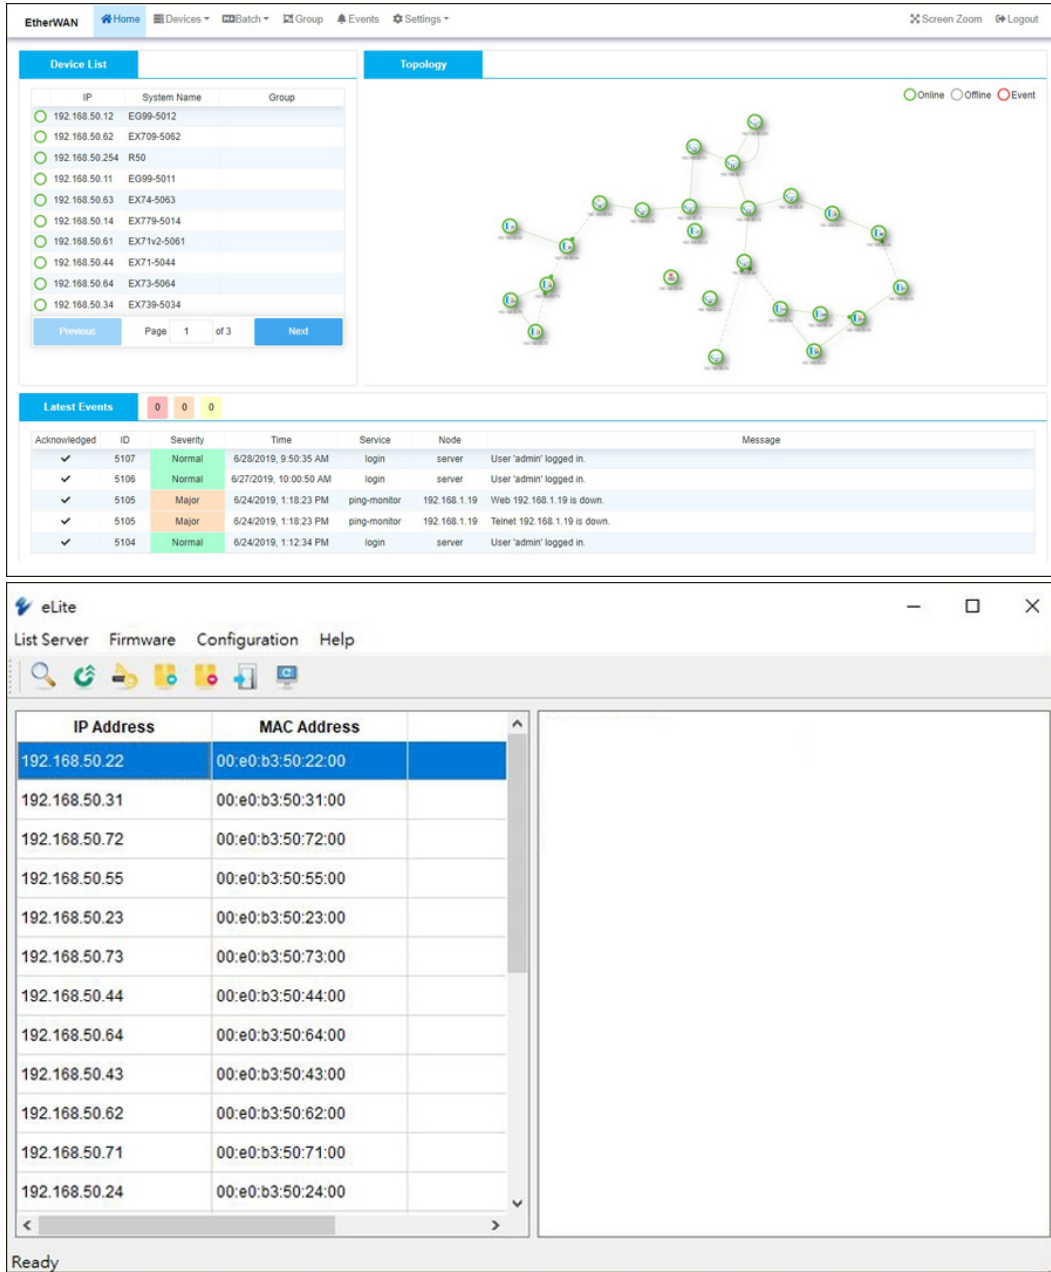

The image displays two screenshots of network management software. The top screenshot shows the EtherWAN eVue interface, which includes a 'Device List' table, a 'Topology' diagram, and a 'Latest Events' log. The bottom screenshot shows the eLite interface, which features a table of IP and MAC addresses.

Device List (from eVue):

IP	System Name	Group
192.168.50.12	EG99-5012	
192.168.50.62	EX709-5062	
192.168.50.254	R50	
192.168.50.11	EG99-5011	
192.168.50.63	EX74-5063	
192.168.50.14	EX779-5014	
192.168.50.61	EX71v2-5061	
192.168.50.44	EX71-5044	
192.168.50.64	EX73-5064	
192.168.50.34	EX739-5034	

Latest Events (from eVue):

Acknowledged	ID	Severity	Time	Service	Node	Message
✓	5107	Normal	6/29/2019, 9:50:35 AM	login	server	User 'admin' logged in.
✓	5106	Normal	6/27/2019, 10:00:50 AM	login	server	User 'admin' logged in.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Web 192.168.1.19 is down.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Telnet 192.168.1.19 is down.
✓	5104	Normal	6/24/2019, 1:12:34 PM	login	server	User 'admin' logged in.

eLite Interface (IP and MAC Address Table):

IP Address	MAC Address
192.168.50.22	00:e0:b3:50:22:00
192.168.50.31	00:e0:b3:50:31:00
192.168.50.72	00:e0:b3:50:72:00
192.168.50.55	00:e0:b3:50:55:00
192.168.50.23	00:e0:b3:50:23:00
192.168.50.73	00:e0:b3:50:73:00
192.168.50.44	00:e0:b3:50:44:00
192.168.50.64	00:e0:b3:50:64:00
192.168.50.43	00:e0:b3:50:43:00
192.168.50.62	00:e0:b3:50:62:00
192.168.50.71	00:e0:b3:50:71:00
192.168.50.24	00:e0:b3:50:24:00

製品型番

+ Model

EX78402-0YBT	4-port 10/100BASE-TX PoE + 2-port Gigabit
EX78802-0YBT	8-port 10/100BASE-TX PoE + 2-port Gigabit
EX78822-XZBT	8-port 10/100BASE-TX PoE + 2-port 100BASE-FX +2-port Gigabit
EX78822-VVBT	8-port 10/100BASE-TX PoE + 2-port 100BASE-SFP +2-port 100/1000BASE-SFP

* DIN-Rail mounting kit included.

+ 100FX Fiber Options (X)

1	Multi Mode (SC) - 2Km
2	Multi Mode (ST) - 2Km
A	Single Mode (SC) - 20Km

* More 100FX Fiber options also available upon request.

+ Gigabit Port Options (Y)

1	10/100/1000BASE-TX
3	1000BASE-SX (SC) - 550m
4	1000BASE-SX (SC) - 2Km
5	1000BASE-SX (ST) - 550m
A	1000BASE-LX (SC) - 10Km
R	1000BASE-BX (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
S	1000BASE-BX (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
V	Support 2-port 100/1000BASE SFP (DDM)

* More Gigabit options also available upon request.

+ Gigabit Port Options (Z)

1	10/100/1000BASE-TX
3	1000BASE-SX (SC) - 550m
4	1000BASE-SX (SC) - 2Km
5	1000BASE-SX (ST) - 550m

A	1000BASE-LX (SC) - 10Km
R	1000BASE-BX (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
S	1000BASE-BX (SC) WDM-TX: 1550nm/RX: 1310nm-20Km

* More Gigabit options also available upon request.

+ Accessories

Hardened Gigabit SFP Module	www.etherwan.com/products/sfp-fiber-transceiver
DIN-Rail Power Supplies	www.etherwan.com/products/din-rail-power-supply (*)
*Recommended Power Supply	NDR-480-48 480W 48VDC DIN-Rail Power Supply
EB-232	Configuration Backup and Restoration Tool

