


EG97244 シリーズ

広範囲動作温度対応産業用/管理型 8ポート 10/100/1000BASE-T +16ポート 100/1000BASE SFP
+4ポート 1G/2.5G/10G SFP+ レイヤ3 スイッチ

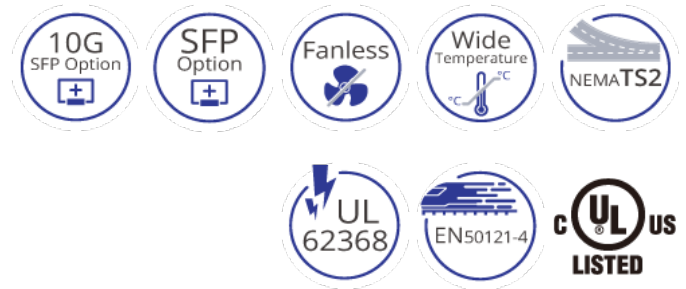

概要

なぜ産業用レイヤ3 スイッチは必要がありますか。

EtherWAN's EG97244 is a hardened layer 3 switch/router, which allow for connecting networks. With multiple gigabit SFP connections for fiber along with a 10-gigabit backbone, the EG97244 provides flexibility, speed, and reliability to support networks for urban infrastructure, transportation, security, and other areas where connectivity is crucial.

EtherWAN — "When Connectivity is Crucial."

特長

+ High Bandwidth and Highly Flexible Ports + Compliant Products

16 x 100/1000M dual-rate SFP ports for multiple fiber connections

4 x 1G/2.5G/10G dual-rate SFP+ ports for connections into the hub/core

8 x 10/100/1000BASE-T RJ45 ports

TAA Compliant for government projects

NEMA TS2 rated

UL certified for safety

+ Hardened-Grade for Non-Ventilated & Harsh Environments

Wide operating temperature range -40 to 75°C (-40 to 167°F)

Fan-less operation

High impact, thermal shock, and electrical noise resistance

+ Management/Security Features

Port control

Storm detection and control

Configure and monitor with eVue™ and eLite™

+ Full Layer 3 Functionality

Optimized routing at hardware level

Improved fault isolation

Layer 3 capability connects networks together

+ Lifetime Warranty

Complimentary Technical Support

Free Firmware Upgrades

Includes ECN and EOL notices

機能

+ Interface

CLI, Telnet, Web GUI

+ Management

Firmware upgrade
Configuration backup
DHCP Server/Client
RMON (Remote Monitoring)
Port Mirroring
NTP (Network Time Protocol) synchronization
LLDP (Link Layer Discovery Protocol)
IPv4/IPv6
SNMP v1/v2c/v3

+ Security

MAC Address filtering
Enable/Disable port
Storm control
System logging
Remote authentication through RADIUS and TACACS+
Complex password support
Multi-user login and privileged access management
SSH for CLI and Telnet security
SSL and HTTPS for web security
ACL (Access Control List, up to 4096 entries)

+ Layer 3 Features IPv4

Unicast Routing

Static Routing (1K)
RIP v1/v2
OSPF v2

Multicast Routing

PIM-DM
PIM-SM
PIM-SSM

Routing Redundancy

VRRP

+ Layer 3 Features IPv6

IPv6 Unicast Routing

RIPng
OSPF v3

IPv6 Multicast Routing

PIM6-DM
PIM6-SM

IPv6 Routing Redundancy

VRRP v3

+ Quality of Service (QoS)

Priority Queues: 8 queues per port
Traffic classification based on IEEE 802.1p CoS (Cost of Service), DSCP (Differentiated Services Code Point), WRR (Weighted Round Robin), and strict mode
Rate Limiting (Ingress/Egress)

+ Layer 2 Features

Auto-negotiation for port speed and duplex
Flow Control
IEEE 802.3x full duplex mode
Back-pressure half duplex mode

Redundant Protocols

IEEE 802.1D STP
IEEE 802.1w RSTP
IEEE 802.1s MSTP
ITU-T G.8032 Ethernet Ring
Protection Switch (ERPS)

VLANs

IEEE 802.1Q Tag VLANs
GVRP
GMRP

Link Aggregation

Static Trunk
IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

+ Software Properties and Performance

Switch IC Capability

320Gbps

Forwarding Rate

238.08Mpps

Total VLAN Entries

256 (4096 VID)

Jumbo Frame Size

12KB

MAC Table Size

24K

Packet Buffer Memory

32M bits

L2 Routes

Up to 24,000 unicast and 1,000 multicast routes

L3 IPv4 Routes

Up to 8,000 unicast and 8,000 multicast routes

L3 IPv6 routes

Up to 2,000 unicast routes

仕様

+ Interface

Ethernet

8 x 10/100/1000BASE-T

16 x 100/1000BASE SFP

4 x 1G/2.5G/10G SFP+

Console

1 x RJ45

Config Backup

1 x USB (Type A Connector)

Alarm Contact

Relay output, current capacity 0.6A/30VDC

LED Indicators

Per Unit: Power 1, Power 2, Alarm

Per Port: Link/Activity

+ Power

Input

VTR: ± 48 VDC Redundant (Terminal block)

VWR: 100-240VAC Redundant (Terminal block)

VCR: 100-240VAC Redundant (AC Inlet)

Power Consumption

75W Max

+ Physical

Casing Material

Aluminum

Dimensions

442 x 325 x 44mm (W x D x H)

17.4" x 12.8" x 1.73"

Weight

5.6kg (12.3lbs)

Installation Type

Rack mounting

IP Rating

IP30

+ Environmental

Operating Temp.

-40 to 75°C (-40 to 167°F)

Storage Temp.

-45 to 85°C (-49 to 185°F)

Relative Humidity

5% to 95% (non-condensing)

MTBF

1,143,890 hours

+ Warranty

Length

Limited Lifetime

Details

www.etherwan.com/support/warranty-policy

+ What's Included

Device

Ethernet Switch

Cables

1 Console Cable

Power

1 AC Power Cord

Installation

Mounting brackets, screws

Documentation

Quick install guide

+ Technology

Standards

IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX/100BASE-FX
IEEE 802.3ab 1000BASE-T
IEEE 802.3ad link aggregation control
IEEE 802.3z 1000BASE-SX/1000BASE-LX
IEEE 802.3x full duplex and flow control
IEEE 802.1D STP
IEEE 802.1p QoS
IEEE 802.1Q Tag VLANs
IEEE 802.1s MSTP
IEEE 802.1w RSTP
IEEE 802.1x PNAC
IEEE 802.1ab LLDP

Forward/Filtering Rate

14,880pps for 10Mbps
148,810pps for 100Mbps
1,488,100pps for 1000Mbps
14,881,000pps for 10Gbps

Processing Type

Store-and-forward
Auto-negotiation
Half-duplex back-pressure and full-duplex flow control
Auto MDI/MDIX

System Memory

4Gb DDR3 SDRAM

Flash Storage

2GB

+ Regulatory

ISO

Manufactured in ISO-9001 facility

EMC

EN 55032

EMI

FCC Part 15B Class A
VCCI Class A
EN 61000-6-4

EMS

EN 61000-4-2 (ESD)
EN 61000-4-3 (Radiated RFI)
EN 61000-4-4 (Burst)
EN 61000-4-5 (Surge)
EN 61000-4-6 (Induced RFI)
EN 61000-4-8 (Magnetic field)

Safety

UL 62368

Traffic

NEMA TS2

Rail

EN 50121-4

Vibration

IEC 60068-2-6


Shock

IEC 60068-2-27


Free Fall

FED STD 101C Method 5007.1

寸法図

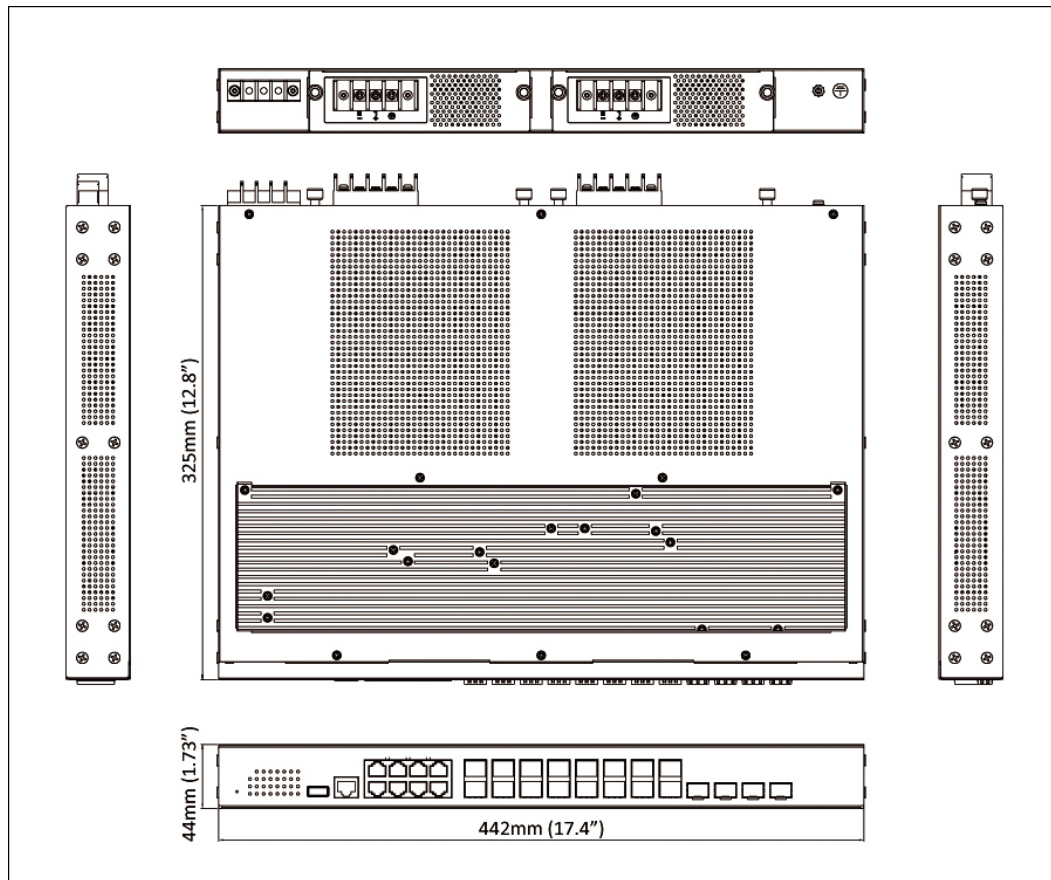

応用例

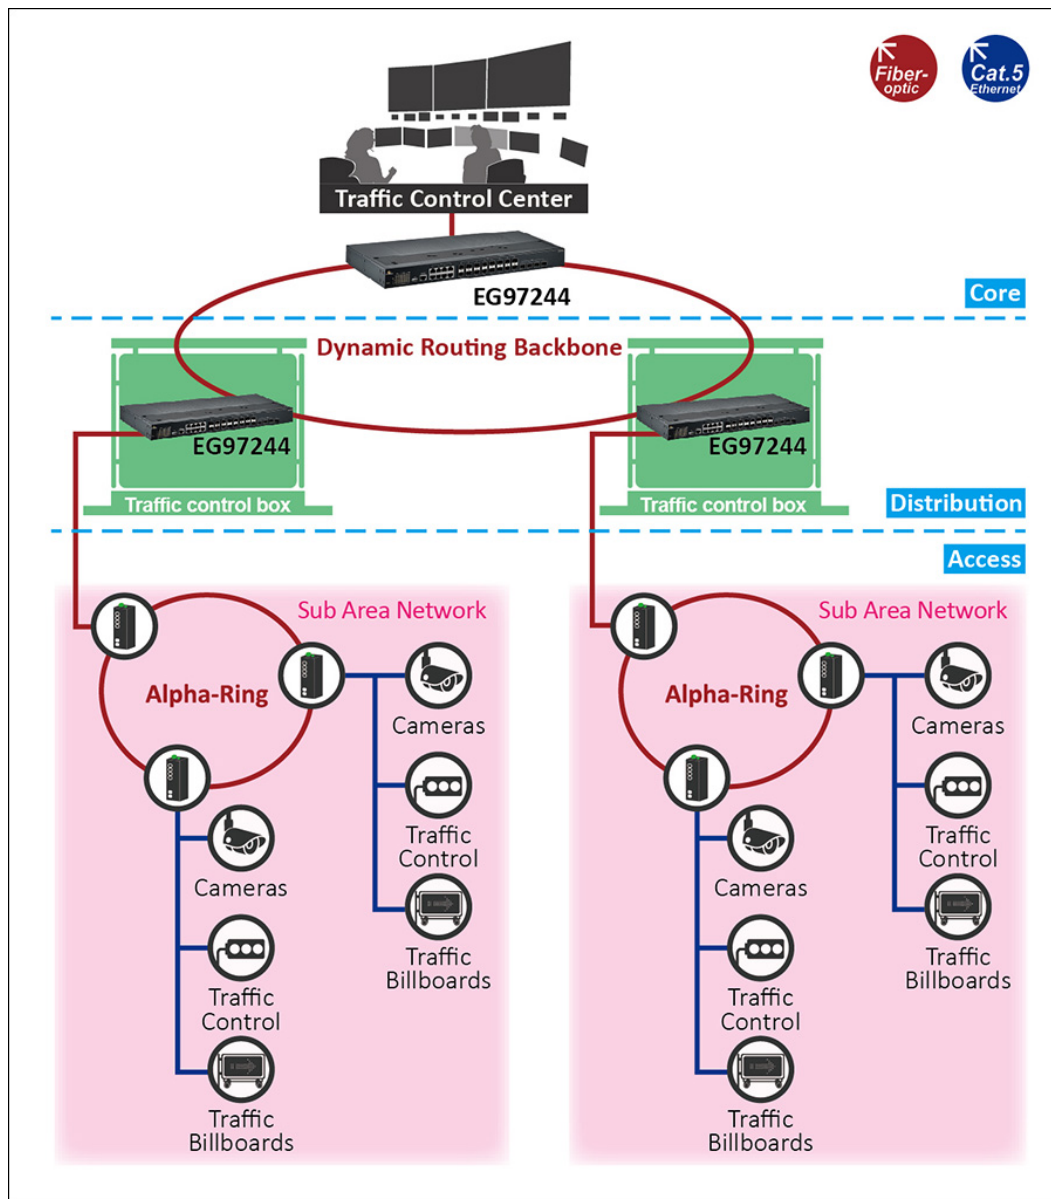


ソフトウェア

Network Management

[eVue™ Network Configuration and Monitoring Tool](#)

Network Discovery

[eLite™ Network Discovery and IP Configuration Tool](#)

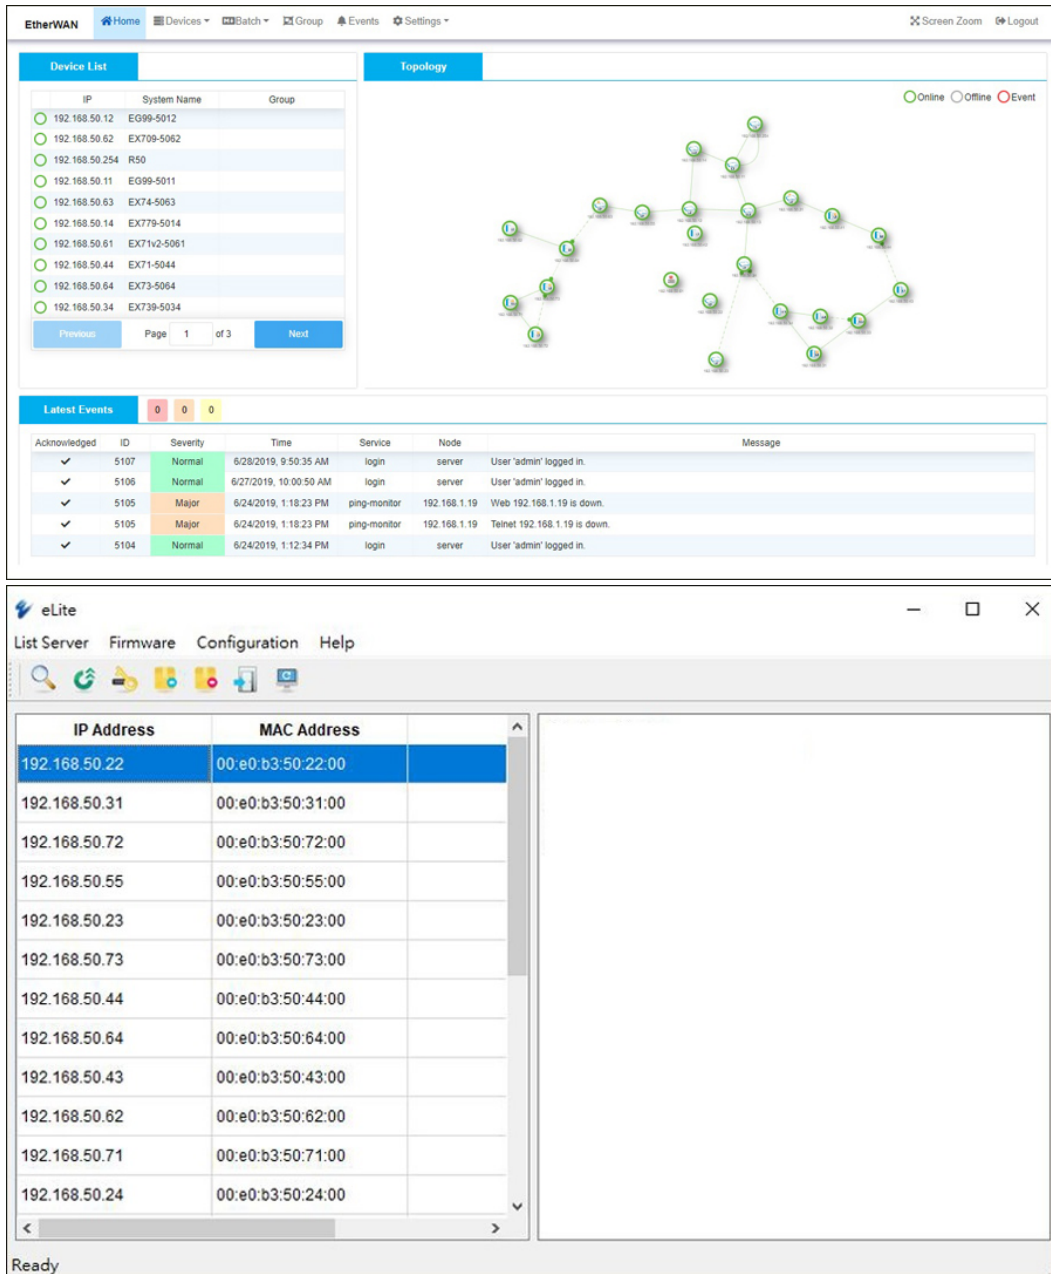

The screenshot displays the EtherWAN eLite software interface. The top navigation bar includes 'Home', 'Devices', 'Batch', 'Group', 'Events', and 'Settings'. The main content area is divided into two sections: 'Device List' and 'Topology'.

Device List: A table showing a list of devices with columns for IP, System Name, and Group. The table contains 10 entries, all with IP addresses in the 192.168.50.x range and system names like EG99-5012, EX709-5062, R50, etc. The 'Group' column is empty for all entries. Below the table are 'Previous', 'Page 1 of 3', and 'Next' buttons.

Topology: A network diagram showing a complex mesh of interconnected nodes. A legend indicates 'Online' (green circle), 'Offline' (grey circle), and 'Event' (red circle).

Latest Events: A table showing recent events with columns for Acknowledged, ID, Severity, Time, Service, Node, and Message. The table contains 6 entries, including login events and ping-monitor alerts.

eLite Window: A separate window titled 'eLite' with a menu bar (List Server, Firmware, Configuration, Help) and a toolbar. It displays a table with IP Address and MAC Address columns. The table lists 12 IP addresses and their corresponding MAC addresses (e.g., 192.168.50.22, 00:e0:b3:50:22:00). A 'Ready' status bar is at the bottom.

製品型番

+ Model



EG97244-4VZ

10/100/1000BASE T(X)	8
1G SFP	16
1G/2.5G/10G SFP+	4

[Quote](#)

+ Accessories

Hardened 100BASE SFP Modules	www.etherwan.com/products/sfp-fiber-transceiver
Hardened Gigabit SFP Modules	www.etherwan.com/products/sfp-fiber-transceiver
Power Supplies	www.etherwan.com/products/power-supplies/power-adapters
EX41-2750A240	Power Module for EG97244 series, 100-240VAC PSU (75W), AC Inlet

