

EX33000 シリーズ

産業用/非管理型 8ポート 10/100BASE PoE (4 x PoE) イーサネット スイッチ



概要

本商品につきましては2025年5月31日をもって販売を終了させて頂きました。代替製品については [こちらのページ](#) をご覧ください。

EtherWAN の EX33000 シリーズは産業用、非管理型、過酷な環境でも簡単に設置できるデザインしたファスト イーサネットスイッチです。

EX33000 シリーズはファスト イーサネット 16ポートを標準装備し、または長い距離の接続ができる 100FX ファイバーポート2個を選択でき、高速なファスト イーサネットフルブットの特徴により、強力なネットワークスイッチになります。

EtherWAN — "When Connectivity is Crucial."

特長

+ 産業用グレード

-10~60°C (14~140°F) 操作温度に対応します。

+ 多種の取付方法を選択可能

DIN レール、パネル、ラックマウントに対応。

+ 光ファイバー接続

100BASE-FX 2ポートまで SC、ST または WDM から選択可能。

仕様

+ 技術規格

Standards

IEEE 802.3, 10BASE-T

IEEE 802.3u 100BASE-TX/100BASE-FX

IEEE 802.3x Full duplex and flow control

Forward/Filtering Rate

14,880pps for 10Mbps

148,810pps for 100Mbps

Packet Buffer Memory

1.625M bits

Processing Type

Store-and-Forward

Auto Negotiation

Half-duplex back-pressure and IEEE 802.3x full-duplex flow control

Auto MDI/MDIX

Address Table Size

4096 MAC addresses

Latency

Less than 10μs

+ インターフェース

イーサネットポート数

10/100BASE-TX: 16, 15 or 14 ports

100BASE-FX: 0, 1 or 2 ports

LED 表示

Per Unit: Power 1 (Green), Power 2 (Green), Power 3 (Green)

Per Port: Link/Act

アラーム接点

リレー出力 許容電流 1A@24VDC

+ 環境条件

使用温度範囲

-10 to 60°C (14 to 140°F)

Tested @ -20 to 70°C (-4 to 158°F)

保存温度範囲

-40 to 85°C (-40 to 185°F)

使用湿度範囲

5% to 95% (無凝結)

+ 電源

電源電圧

Redundant power inputs:
12 to 48VDC (Terminal Block),
12VDC (DC Jack)

消費電力

7.4W Max. 0.6A@12VDC, 0.3A@24VDC,
0.15A@48VDC

+ 物理仕様

筐体

Aluminum Case

IP Rating

IP30

寸法

69 x 110 x 135mm (W x D x H) (2.72" x 4.33" x
5.31")

重量

0.87Kg (1.92lbs.)

取付方法

DIN-Rail (Top hat type 35mm), Panel, or Rack
mounting

+ 信頼性認証

ISO

Manufactured in ISO-9001 facility

EMI

FCC Part 15B Class A

VCCI Class A

EN 61000-6-4

EN 55022

EN 61000-3-2

EN 61000-3-3

EMS

EN 61000-6-2

- EN 61000-4-2 (ESD)

- EN 61000-4-3 (Radiated RFI)

- EN 61000-4-4 (Burst)

- EN 61000-4-5 (Surge)

- EN 61000-4-6 (Induced RFI)

- EN 61000-4-8 (Magnetic field)

Safety

UL 508


Environmental Test Compliance

IEC 60068-2-6 Fc (Vibration)

IEC 60068-2-27 Ea (Shock)

FED STD 101C Method 5007.1 (Free fall w/package)

寸法図

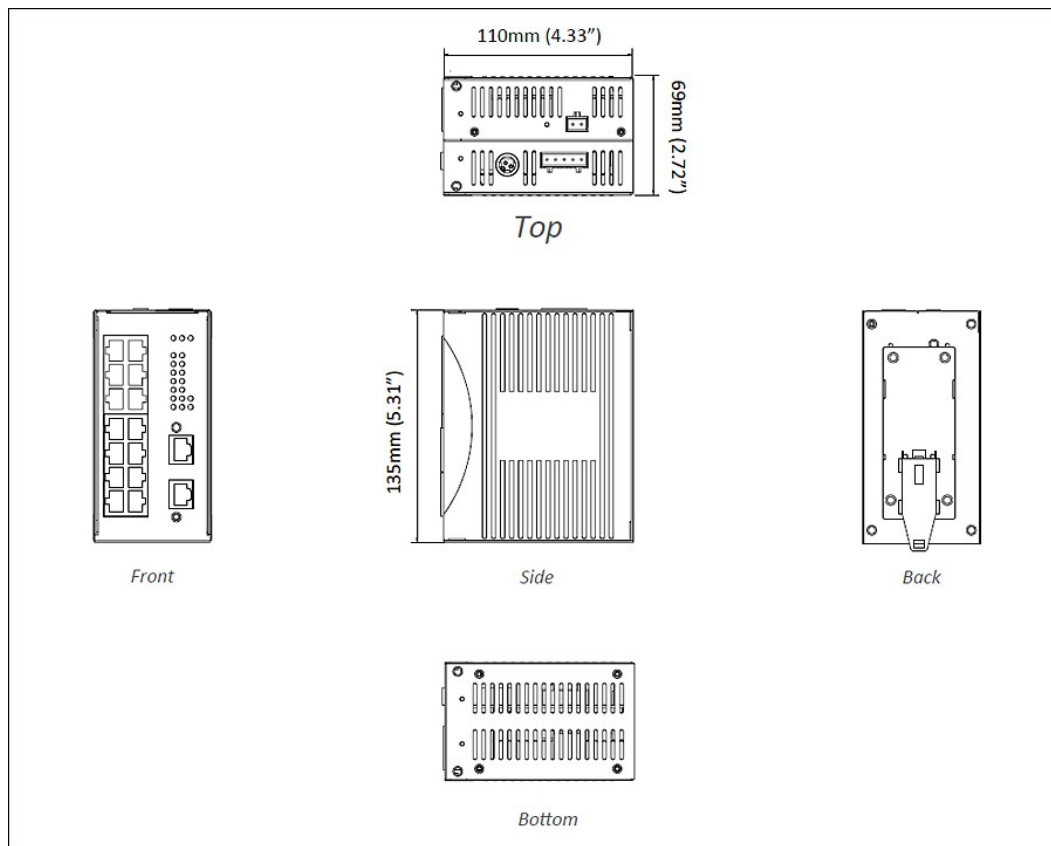

製品型番

型番

EX33160-00B	16-port 10/100BASE-TX Industrial Unmanaged Ethernet Switch
EX33151-X0B	15-port 10/100BASE-TX +1-port 100BASE-FX Industrial Unmanaged Ethernet Switch
EX33142-X0B	14-port 10/100BASE-TX +2-port 100BASE-FX Industrial Unmanaged Ethernet Switch

* DINレールマウントキットを含む。

+ 100FX 光ポート オプション (X)

1	Multi Mode (SC) - 2Km
2	Multi Mode (ST) - 2Km
6	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-2Km
7	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-2Km
8	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-5Km
9	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-5Km
A	Single Mode (SC) - 20Km
B	Single Mode (SC) - 40Km
H	Single Mode (ST) - 20Km
P	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
Q	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
R	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-40Km
S	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-40Km

+ オプション関連製品

KP-AA96-480	Panel Mounting Kit
KR-BK-43-400	Rack Mounting Kit
HDR-30-24	30W/1.5A DIN-Rail 24VDC Industrial Power Supply
HDR-60-24	60W/2.5A DIN-Rail 24VDC Industrial Power Supply
EDR-75-24	75W/3.2A DIN-Rail 24VDC Industrial Power Supply
EX41-145046-X	Power Supply 45W 12VDC with Open Wire (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA

EX41-145044-X Power Supply 45W 12VDC with Latch
(X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA



© EtherWAN Systems, Inc. All rights reserved. 20260107

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.