

EX78900X シリーズ

広範囲動作温度対応産業用/管理型 12ポート 10/100/1000BASE-T(X) +4ポート 1G/10G SFP+ PoE
ギガビット イーサネットスイッチ



概要

EtherWAN の EX78900X シリーズは、工業および重要なネットワーク向けに設計された、堅牢な DIN レール取付型のマネジド PoE スイッチです。最大で **12 ポートの Gigabit PoE** に対応し、[IEEE 802.3bt 規格](#) をサポートしています。**1 ポートあたり最大 90W** の給電能力を持ち、**合計最大 360W** の電力供給が可能です。さらに、**4 ポートのデュアルレート 1/10G SFP+ アップリンク** を搭載し、高速なファイバー接続に対応します。ファンレス設計により、**-40~75°C** の過酷な環境下でも安定した動作が可能で、衝撃、熱ショック、電磁ノイズへの耐性など、工業グレードの保護性能を備えています。EX78900X full-duplexのスイッチング技術に対応し、[PoE Watchdog 自動復旧機能](#)、[802.1x アクセス制御](#)、[RADIUS/TACACS+ 認証](#) を搭載しています。直感的な管理が可能な [eVue™](#) と [eLite™](#) プラットフォームにより、柔軟性とネットワークセキュリティの両立を実現します。また、**Lite Layer 3 機能** としてスタティックルート、RIP、OSPF、VRRP を内蔵しており、ブロードキャストトラフィックを削減しネットワーク全体の効率を向上します。スマートシティ、交通インフラ、産業オートメーションなどの導入に最適なソリューションです。

IEC 62443-4-2認証 — 重要な産業及びインフラ用途におけるサイバーレジリエンスと運用信頼性を向上させます。

EtherWAN — "When Connectivity is Crucial."

特長

+ High Bandwidth and Versatility

12 10/100/1000BASE-T(X) ports for high bandwidth connections
Up to 4 Dual-rate 1/10G SFP+ uplink ports for fiber connections
Full capacity switching running at full duplex

+ PoE Features

IEEE 802.3bt with up to 90W per port; 360W total power budget
PoE watchdog monitors status of connected PoE devices

+ Hardened-Grade for Non-Ventilated & Harsh Environments

Wide operating temperature range -40 to 75°C (-40 to 167°F)
Fanless operation
High impact, thermal shock, and electrical noise resistance

+ Management/Security Features

Port control, SFTP
802.1x port-based network access control and remote authentication through RADIUS and TACACS+
Configure and monitor with eVue™ and eLite™

+ Lite Layer 3 Functionality

Static routing, RIP v1/v2, and OSPF
Redundancy with VRRP
Reduces amount of broadcast traffic

+ Support

Complimentary technical support
Free firmware upgrades and notifications
Limited lifetime warranty

機能

+ Interface

CLI, Telnet, Web GUI, SSH

+ Management

SFTP (Secured FTP) support
Configuration backup
DHCP Server/Client
RMON (Remote Monitoring)
Port Mirroring
NTP (Network Time Protocol) synchronization
PoE Watchdog
LLDP (Link Layer Discovery Protocol)
IPv4/IPv6
SNMP v1/v2c/v3
Modbus TCP

+ Security

MAC Address filtering
Enable/Disable port
Storm Control and Detection
System logging
IEEE 802.1x LAN Access control
Remote authentication through RADIUS and TACACS+
Complex password support
Multi-user login and privileged access management
SSH for CLI and Telnet security
TLS and HTTPS for web security
ACL (Access Control List, up to 4096 entries)
IPSG (IP Source guard)
DAI (Dynamic ARP Inspection)
DHCP Snooping

+ Layer 3 Features

IP Packet Routing

Maximum number of routes in hardware: 64 entries

Static Routing

RIP v1/v2

OSPF v2

Routing Redundancy

VRRP

+ Software Properties and Performance

Switching Fabric

104Gbps

Forwarding Rate

75.29Mpps

Max VLANs

256 (4096 VID)

Jumbo Frame Size

9KB

MAC Table Size

16K

Packet Buffer Memory

12M bits

+ Quality of Service (QoS)

Priority Queues: 8 queues per port

Traffic classification based on IEEE 802.1p CoS (Cost of Service), DSCP (Differentiated Services Code Point), WRR (Weighted Round Robin), and strict mode

Rate Limiting (Ingress/Egress)

仕様

+ Interface

Ethernet

12 x 10/100/1000BASE-T(X)

4 x 1/10G SFP+

Console

1 x RJ45

Config Backup

1 x USB (Type A Connector)

Digital Input

2 x Digital Input

Wet Contact: 0-3V for State 0; 13-30V for State 1;
max input current: 8mA

Dry Contact: Logic Level 1-Close to GND; Logic
Level 0-Open

Alarm Contact

2 x Relay output, current capacity; 0.5A/48VDC

LED Indicators

Per Unit: Power 1, Power 2

Per Port: Link/Activity (Green)

Per PoE Port: PoE Status (Orange)

+ Physical

Casing Material

Aluminum

IP Rating

IP30

Dimensions

72 x 140 x 170mm (W x D x H)

2.8" x 5.5" x 6.7"

Weight

1.5kg (3.3lbs)

Installation Type

DIN-rail mounting

+ Environmental

Operating Temp.

-40 to 75°C (-40 to 167°F)

Storage Temp.

-45 to 85°C (-49 to 185°F)

Relative Humidity

5% to 95% (non-condensing)

MTBF

1,496,987 hours

+ Technology

Standards

IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX/100BASE-FX
IEEE 802.3ab 1000BASE-T
IEEE 802.3ad link aggregation control
IEEE 802.3z 1000BASE-SX/1000BASE-LX
IEEE 802.3x full duplex and flow control
IEEE 802.1D STP
IEEE 802.1p QoS
IEEE 802.1Q Tag VLANs
IEEE 802.1s MSTP
IEEE 802.1w RSTP
IEEE 802.1x PNAC
IEEE 802.1ab LLDP
IEEE 802.3az EEE
IEEE 802.3af/at/bt Power over Ethernet
IEEE 1588v2 PTP

Forward/Filtering Rate

14,880pps for 10Mbps
148,810pps for 100Mbps
1,488,100pps for 1000Mbps
14,881,000pps for 10Gbps

Processing Type

Store-and-forward
Auto-negotiation
Half-duplex back-pressure and full-duplex flow control
Auto MDI/MDIX

System Memory

2Gb DDR3 SDRAM

Flash Storage

1Gb

+ Regulatory

ISO

Manufactured in ISO-9001 facility

EMI

FCC Part 15B Class A

VCCI Class A

EN 61000-6-4

EN 61000-3-2

EN 61000-3-3

BSMI

EMS

EN 61000-6-2

EN 61000-4-2 (ESD)

EN 61000-4-3 (Radiated RFI)

EN 61000-4-4 (Burst)

EN 61000-4-5 (Surge)

PoE Ports: line to earth 6kV Surge

EN 61000-4-6 (Induced RFI)

EN 61000-4-8 (Magnetic field)

Safety

UL 61010

Cybersecurity

IEC 62443-4-1

IEC 62443-4-2

Traffic

NEMA TS2

Rail

Railway

EN 50121-4

Vibration

IEC 60068-2-6

Shock

IEC 60068-2-27

Free Fall

FED STD 101C Method 5007.1

+ Power

Input

46-57VDC Redundant (Terminal block)**

** 46-57VDC for IEEE 802.3af type 1, ≤15.4W PD devices.

52-57VDC for IEEE 802.3at/bt type 2/3, 30W, 60W PD devices.

54-57VDC for IEEE 802.3bt, type 4, 90W PD devices

Power Consumption

20W Max (without PoE)

PoE Power Output

Ports 1-12: Up to 90W/port; Power Budget: 360W

Protection

Reverse Polarity Protection

+ Warranty

Length

Limited Lifetime

Details

www.etherwan.com/support/warranty-policy

+ What's Included

Device

Ethernet switch

Cables

1 Console cable


Installation

Mounting brackets, screws


Documentation

Quick install guide

寸法図

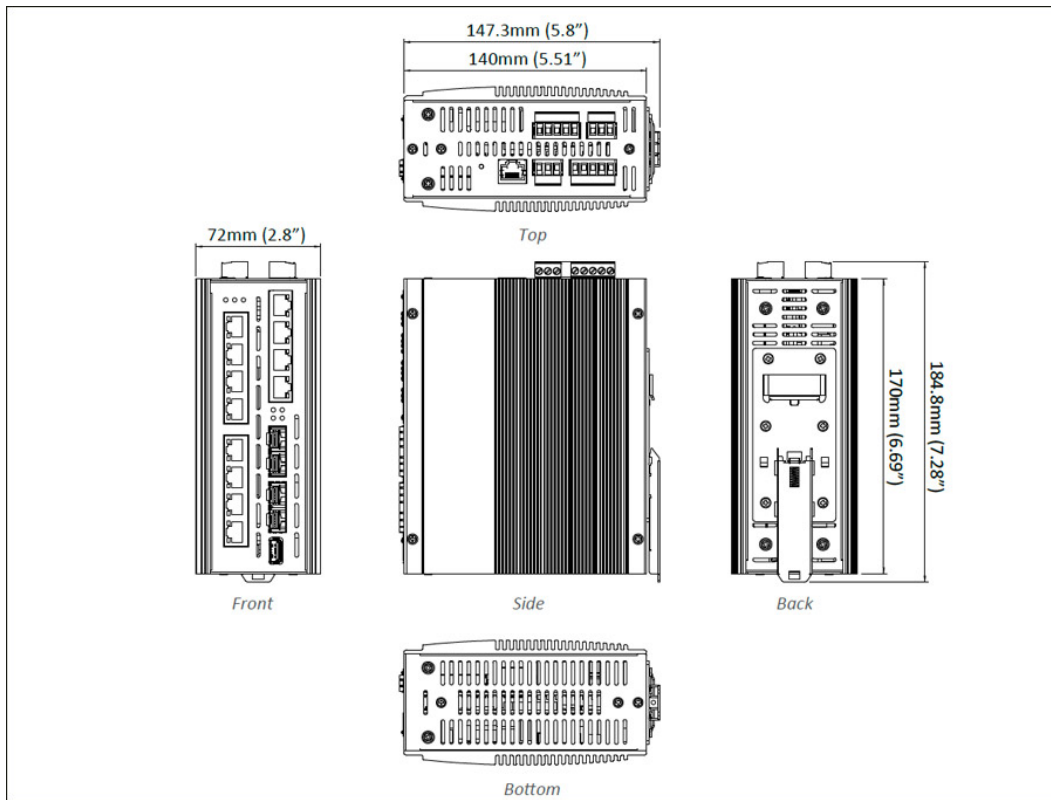

応用例

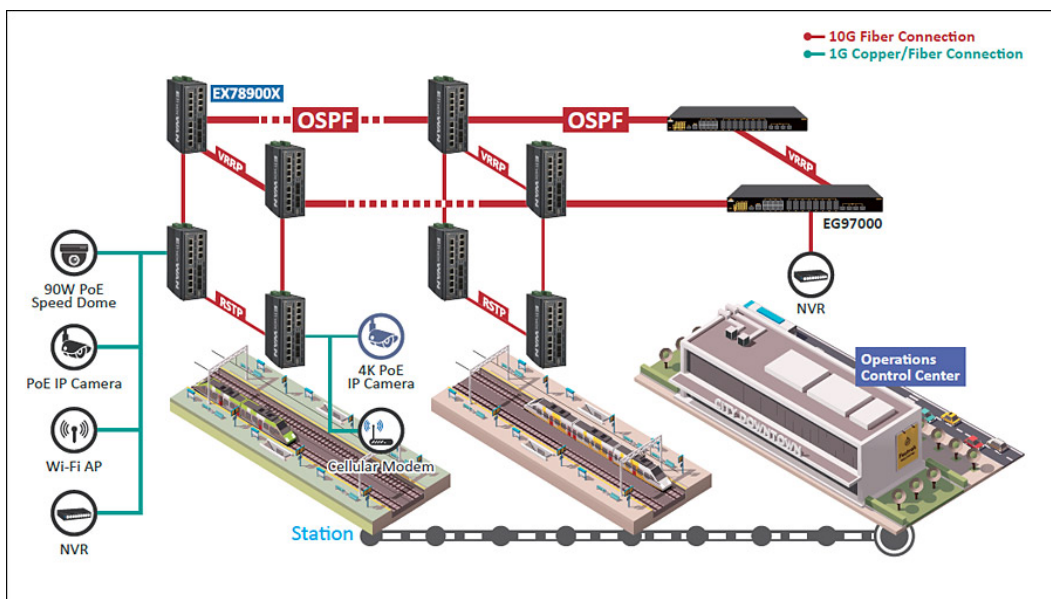


ソフトウェア

Network Management

[eVue™ Network Configuration and Monitoring Tool](#)

Network Discovery

[eLite™ Network Discovery and IP Configuration Tool](#)

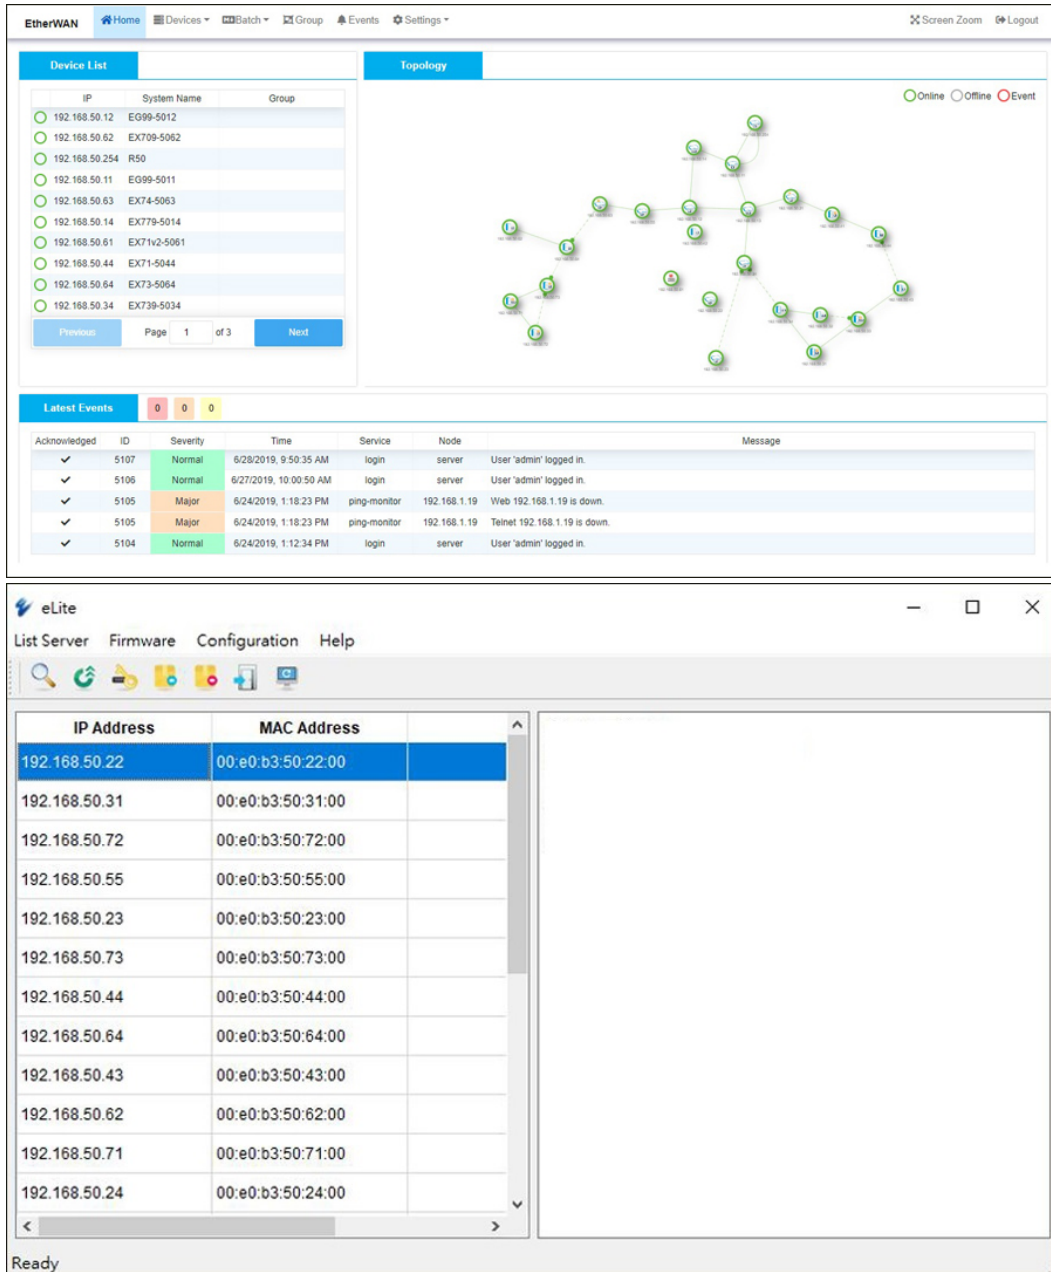

The image displays two screenshots of network management software. The top screenshot shows the EtherWAN eVue interface, which includes a 'Device List' table, a 'Topology' diagram, and a 'Latest Events' log. The bottom screenshot shows the eLite interface, which features a table of IP and MAC addresses and a 'Ready' status bar.

Device List

IP	System Name	Group
192.168.50.12	EG99-5012	
192.168.50.62	EX709-5062	
192.168.50.254	R50	
192.168.50.11	EG99-5011	
192.168.50.63	EX74-5063	
192.168.50.14	EX779-5014	
192.168.50.61	EX71v2-5061	
192.168.50.44	EX71-5044	
192.168.50.64	EX73-5064	
192.168.50.34	EX739-5034	

Latest Events

Acknowledged	ID	Severity	Time	Service	Node	Message
✓	5107	Normal	6/28/2019, 9:50:35 AM	login	server	User 'admin' logged in.
✓	5106	Normal	6/27/2019, 10:00:50 AM	login	server	User 'admin' logged in.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Web 192.168.1.19 is down.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Telnet 192.168.1.19 is down.
✓	5104	Normal	6/24/2019, 1:12:34 PM	login	server	User 'admin' logged in.

eLite

List Server Firmware Configuration Help

IP Address	MAC Address
192.168.50.22	00:e0:b3:50:22:00
192.168.50.31	00:e0:b3:50:31:00
192.168.50.72	00:e0:b3:50:72:00
192.168.50.55	00:e0:b3:50:55:00
192.168.50.23	00:e0:b3:50:23:00
192.168.50.73	00:e0:b3:50:73:00
192.168.50.44	00:e0:b3:50:44:00
192.168.50.64	00:e0:b3:50:64:00
192.168.50.43	00:e0:b3:50:43:00
192.168.50.62	00:e0:b3:50:62:00
192.168.50.71	00:e0:b3:50:71:00
192.168.50.24	00:e0:b3:50:24:00

Ready

製品型番

+ Model



EX78934X-0VB

10/100/1000BASE TX	12
1G/10G SFP+	4
supports PoE++	12
PoE per port	最大 90W
お問い合わせ	

+ Accessories

Hardened Gigabit & 10 Gigabit SFP Modules	www.etherwan.com/products/sfp-fiber-transceiver
DIN-Rail Power Supplies	www.etherwan.com/products/din-rail-power-supply (*)
*Recommended Power Supply	NDR-480-48 480W 48VDC DIN-Rail Power Supply

