


EW50-V Series

Industrial LTE Cellular Gateway - Intelligent Assistant-Enabled by Docker

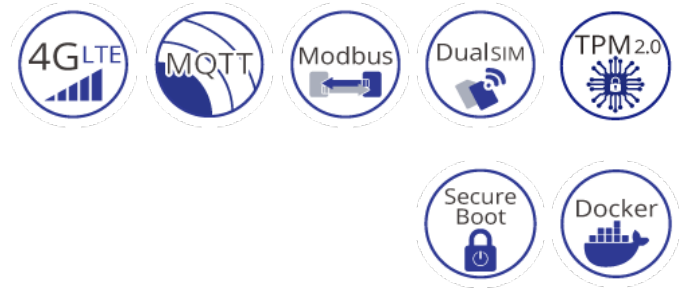

Overview

Your Secure and Reliable Next-Gen IIoT Cellular Gateway

The EW50-V is the latest addition to the popular EW50 series. It provides reliable and secure connectivity designed for harsh environments, giving operations and IT real-time awareness with remote monitoring. Moreover, The EW50-V is a versatile 4G LTE smart gateway with Ethernet, serial, and digital I/O to satisfy most applications. Global LTE options make it easy to get connected.

EtherWAN — "When Connectivity is Crucial."

Spotlight

+ Flexible Configurations with Reliable Connectivity

Ethernet, serial, DI/DO and Modbus bridging for connecting diverse field assets

Ideal for M2M and industrial IoT applications

+ Comprehensive Data Security

IPSec and OpenVPN support up to 10 concurrent tunnels

+ Remote Control

EtherWAN Remote Device Manager **"Pave2Edge"** for deployment and remote control

+ Reliable and Uninterrupted Connection

EtherWAN **"Garantie Link"** to keep network connection always on

Equipped with dual SIM cards for failover

Failover management for network reliability and uninterrupted uptime

On online 4G LTE internet connection

+ Rugged Industrial Design

Features metal housing with fan-less cooling, IP30

Supports -30 to 75°C (-22 to 167°F) operating temperature

+ Secure Boot + TPM 2.0

Secure boot protects device against any attempt to use malware.

Trusted Platform Module (TPM) is to provide hardware-based, security-related functions that helps you with actions such as generating, storing, and limiting the use of cryptographic keys.

+ 'Docker' Containerization Supported

The most popular containerization platforms that allow you to develop, deploy, and run applications inside containers.

Specifications

+ Cellular Interface

Standards

Cellular Frequency Bands: (Please check Frequency Bands Region Codes)

LTE Cat. 4: FDD-LTE, TDD-LTE, Transfer rate (max):

LTE FDD: 150Mbps down; 50Mbps up

LTE TDD: 130Mbps down; 35Mbps up

3G: WCDMA, Transfer rate (max): 42Mbps down;
5.76Mbps up

Antenna connector

2 x SMA Female

SIM Slot

2 Nano SIM

+ Field Communication

COM Port Transparent

TCP Client, TCP Server

Modbus

Gateway for Modbus TCP, Modbus RTU

Data Interchange

MQTT and Cloud

Data Logging

Monitoring Mode and Proxy mode

+ Cloud Development Platform

Platform

Support Microsoft Azure / AWS

+ Ethernet

Standards

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX/100BASE-FX

IEEE 802.3ab 1000BASE-T

Ports

2 x RJ45 GE

Physical Layer

10/100/1000BASE-T

+ Serial

Ports

2 x RS-485

+ Power

Input

DC 12 - 24V

Power consumption

8.5W Max.

+ Mechanical

Casing

Metal

Dimension

130 x 40 x 106 mm (w/o mounting brackets)

Weight

0.9Kg (1.98lb)

Installation

DIN-Rail

+ I/O Connectors

Ports

1 x Digital In ("Logic 0": 0-2V, "Logic 1": 5-30V)

1 X Digital Out (None-Relay Output, 30V/1A,

Sink Type , Normal Open)

+ SD Card

SD Card

Micro SD card x 1 (Up to 64GB)

+ Functions

Port Forwarding

Port Forwarding, DMZ

VPN

IPSec, OpenVPN

Event Engine/ Event Handling

Events: SMS, DI, Modbus, MQTT, PING, RSSI, System

Actions: SMS, email, DO, Modbus, MQTT, System, Reboot, LINE Message

RESTful API

Easy to remote configure settings

F/W Upgrade

By OTA (Over-the-Air)

+ Environment Limits

Operating Temperature

-30 to 75°C (-22 to 167°F)

Storage Temperature

-40 to 85°C (-40 to 185°F)

Ambient Relative Humidity

5% to 95%

+ Regulatory Approvals

Safety

IEC 62368-1: 2018

Emissions/Immunity

EW50-VEA CE/ TDRA / IMDA / NTBC / NTC

EW50-VT NCC BSMI

EW50-VUS

FCC

Cellular: PTCRB/AT&T/T-Mobile

EW50-VJP JATE

Standard Accessory

4G LTE antenna x 2

GPS antenna x 1 (US model only)


DIN Rail kit x 1 + 2 screws

6 PIN terminal block x 1


4 PIN terminal block x 1

2 PIN terminal block x 1

Application

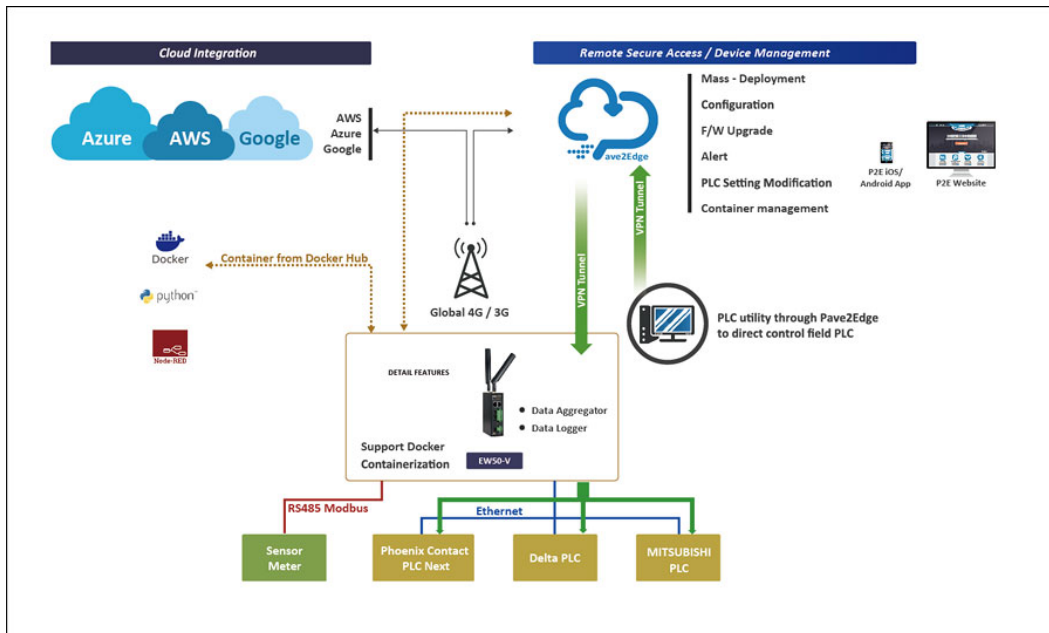

Dimensions

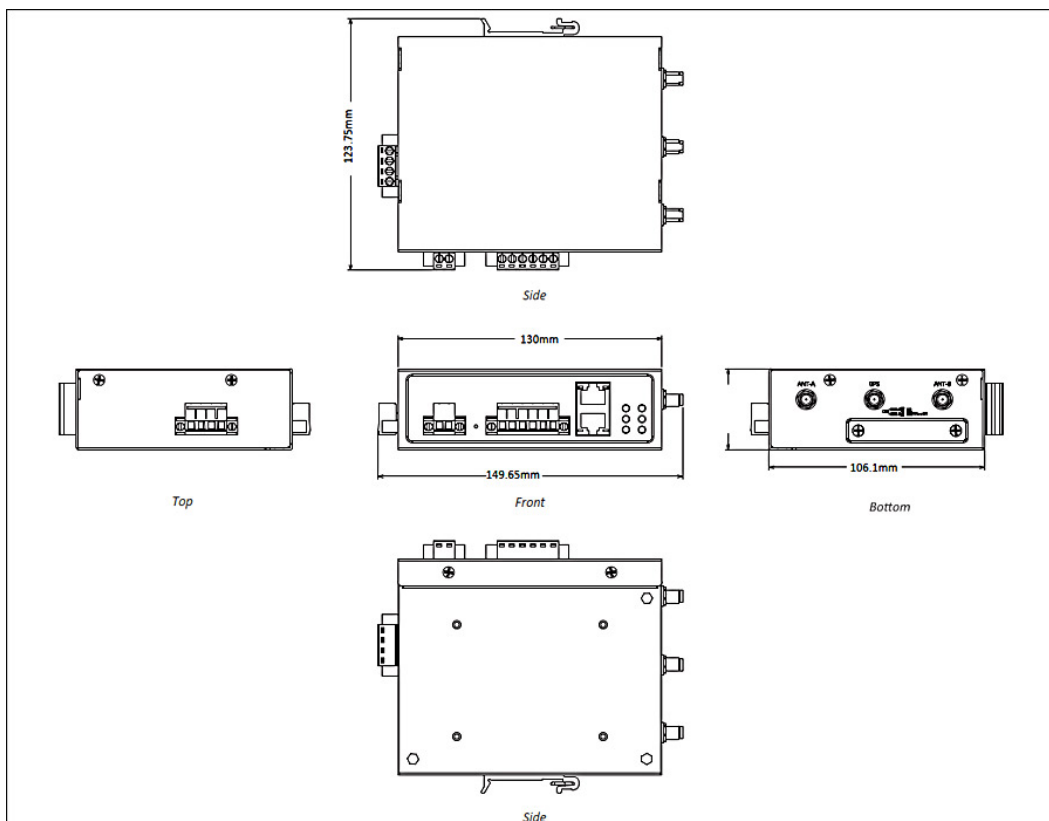

Frequency Bands

	4G LTE		3G	Region
Sku Code	FDD LTE	TDD LTE	WCDMA	
EA	B1 (2100) / 3 (1800) / 5 (850) / 7 (2600) / 8 (900) / B20 (800)	B38 (2600) / B40 (2300) /B41(2500)	/B41(2500) B1(2100) / 5 (850) / 8 (900)	EU, APAC
US	B2 (1900) / B4 (2100) / B5 (850) / B13 (700) / B14 (700) / B66 (2100) / B71 (600)	B40(2300)	B2 (1900) / B4 (2100) / B5 (850)	USA
JP	B1 (2100) / B3 (1800) / B8(900) / B18 (800 Lower) / B19 (800 Upper) / B26	B41(TD 2500)	B1 (2100) / 6 (UMTS only) / 8 (900) / 19 (800 Upper)	Japan
VT	B1(2100) / B2(1900) / B3 (1800) / B4(2100) / B5 (850) / B7 (2600) / B8 (900) / B12 (700) / B13 (700) / B18 (850) / B19 (850) / B20 (800) / B26 (850) / B28 (700) / B66 (2100)	B38 (2600) / B40 (2300) / B41 (2500)		Taiwan

Ordering Info

+ Model

EW50-VEA	Industrial LTE Cellular Gateway-EU & APAC
EW50-VUS	Industrial LTE Cellular Gateway-USA
EW50-VJP	Industrial LTE Cellular Gateway-Japan
EW50-VT	Industrial LTE Cellular Gateway-Taiwan

+ Optional Accessories

HDR-30-12	24W/ 2A DIN Rail 12VDC Industrial Power Supply					
HDR-30-24	30W/1.5A DIN-Rail 24VDC Hardened Power Supply					
	GWAP-1	Item	Amount	Frequency	Description	Note
		LTE	2	698-960/ 1710-2170/ 2300-2690MHz	Cellular Omni Antenna, N/female Jack Bulkhead	IP67
		Surge Protector	2	-	0-6GHz Surge Lightning Protector, N/female Jack Bulkhead To N/male Plug	IP67
		Bracket	2	-	-	-
		LTE Cable	2	-	SMA/male Plug To N/male Plug with NFC200 Cable	-
Image	P/N.	Item	Amount	Frequency	Description	Note



W96G- Magnetic Cellular 1 -
T00B- Antenna Base
A1A3

This Not
magnetic antenna base IP67
can be used on EW50 /
EW50-V / EW200 series.
Cable length is 2M.Each
model needs 2 antenna
bases.

+ Tune-up Power

Technologies	Frequency range (MHz)	Max. Transmit Power	Tune-Up Power Tolerance
WCDMA Band I	1920-1980 MHz	24dBm	+1/-3dB
WCDMA Band VIII	880-915 MHz	24dBm	+1/-3dB
LTE Band 1	1920-1980 MHz	23dBm	±2dB
LTE Band 7	2500-2570 MHz	23dBm	±2dB
LTE Band 8	880-915 MHz	23dBm	±2dB
LTE Band 20	832-862 MHz	23dBm	±2dB
LTE Band 38	2570-2620 MHz	23dBm	±2dB
LTE Band 40	2300-2400 MHz	23dBm	±2dB

