

EX77964

Hardened Managed 24-port Gigabit and 4-port 1G/10G SFP+ Ethernet Switch



Overview

This product is discontinued as of 19 September 2026. [Click here](#) for alternative product.

EtherWAN's EX77964 is a 28-Port gigabit hardened rack mounted managed Ethernet switch platform. Equipped with 16 gigabit copper, 8 gigabit copper/SFP combo and 4 10-gigabit SFP+ ports, the EX77964 provides flexibility, speed, and reliability to support networks for urban infrastructure, transportation, security, power substations, and other areas where connectivity is crucial.

EtherWAN — "When Connectivity is Crucial."

Highlights

+ Hardened-Grade for Non-Ventilated & Harsh Environments

Wide operating temperature range -40 to 75°C (-40 to 167°F)

Fanless operation

High impact, thermal shock, and electrical noise resistance

+ L2/L3 Functionality

Static routing, RIP v1/v2, and OSPF support

Redundancy with VRRP

Reduces amount of broadcast traffic

+ High Bandwidth and Versatility

Up to 24 10/100/1000BASE-T(X) ports

Up to 8 dual-rate 100/1000BASE SFP ports

4 1G/10G SFP+ uplink ports

+ Support

Complimentary Technical Support

Free Firmware Upgrades

Limited Lifetime Warranty

Features

+ Interface

CLI, Telnet and Web Browser
SNMP v1/v2c/v3

+ Management

Firmware upgrade
Configuration backup via TFTP
DHCP Server/Client
RMON (Remote Monitoring)
Port Mirroring: TX/RX and both
NTP (Network Time Protocol) synchronization
IEEE 802.1ab LLDP (Link Layer Discovery Protocol)
IPv4/IPv6

+ Security

MAC Address Filtering
Enable/Disable port
Storm control (Broadcast and multicast types)
IEEE 802.1x LAN Access Control
Remote authentication through RADIUS and TACACS+
SSH for CLI and Telnet security
SSL for web security
ACL (Access Control List)

+ Quality of Service (QoS)

Priority Queues: 4 queues per port
Traffic classification based on IEEE 802.1p CoS, DSCP, WRR and strict mode
Rate Limiting (Ingress/Egress)

+ Layer 2 Features

Auto-negotiation for port speed and duplex mode

Flow Control
IEEE 802.3x Full duplex mode
Back-Pressure half duplex mode

Redundant Protocols

IEEE 802.1D STP
IEEE 802.1w RSTP
IEEE 802.1s MSTP
EtherWAN's Alpha-Ring network fault recovery (<15ms) and Alpha-Chain

VLANs

IEEE 802.1Q Tag VLANs (128 groups, 4096 VID)
GVRP
GMRP

Link Aggregation

Static Trunk (4 groups, support MAC base)
IEEE 802.3ad LACP

IGMP Snooping v1/v2/v3

+ Layer 3 Features

IP Packet Routing

Maximum number of routes in hardware: 64 entries
Static Routing
RIP v1/v2
OSPF v2

Routing Redundancy

VRRP

Specifications

+ Interface

Ethernet

16 or 24 x 10/100/1000BASE-T(X)

8 x 100/1000BASE SFP

4 x 10G SFP+

Console

1 x RJ45 RS-232

Config Backup

1 x USB (Type A Connector)

Alarm Contact

1 x Relay output, current capacity 0.6A/30VDC

LED Indicators

Per Unit: Power

Per Port: Link/Activity (Green)

+ Physical

Casing Material

Metal

IP Rating

IP30

Dimensions

430 x 254 x 44.2mm (W x D x H)

16.9" x 10" x 1.74"

Weight

3.29Kg (7.25lbs)

Installation Type

Rack mounting

+ Regulatory

ISO

Manufactured in ISO-9001 facility

EMI

FCC Part 15B Class A

VCCI Class A

EN 61000-6-4

EN 61000-3-2

EN 61000-3-3

EMS

EN 61000-6-2

EN 61000-4-2 (ESD)

EN 61000-4-3 (Radiated RFI)

EN 61000-4-4 (Burst)

EN 61000-4-5 (Surge)

EN 61000-4-6 (Induced RFI)

EN 61000-4-8 (Magnetic Field)

Safety

UL 62368

Vibration

IEC 60068-2-6 Fc

Shock

IEC 60068-2-27 Ea

Free Fall

FED STD 101C Method 5007.1

Industrial Compliance

NEMA TS2

+ Technology

Standards

IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX/100BASE-FX
IEEE 802.3ab 1000BASE-T
IEEE 802.3z 1000BASE-SX/1000BASE-LX
IEEE 802.3x Full duplex and flow control
IEEE 802.1p QoS
IEEE 802.1Q Tag VLANs
IEEE 802.1w RSTP
IEEE 802.1x PNAC

Forward/Filtering Rate

14,880pps for 10Mbps
148,810pps for 100Mbps
1,488,100pps for 1000Mbps
14,881,000pps for 10Gbps

Processing Type

Store-and-Forward
Auto-negotiation
Half-duplex back-pressure and IEEE 802.3x Full-duplex flow control
Auto MDI/MDIX

Address Table Size

16K MAC Addresses

+ Power

Input

12-24VDC Redundant (Terminal block)

Power Consumption

31.08W

+ Environmental

Operating Temp.

-40 to 75°C (-40 to 167°F)

Storage Temp.

-45 to 85°C (-49 to 185°F)

Relative Humidity

5% to 95% (non-condensing)

+ Warranty

Length

Limited Lifetime

Details

www.etherwan.com/support/warranty-policy

+ What's Included

Device

Ethernet Switch

Cables

1 Console Cable


Installation

Mounting brackets


Documentation

Quick Install Guide

Dimensions

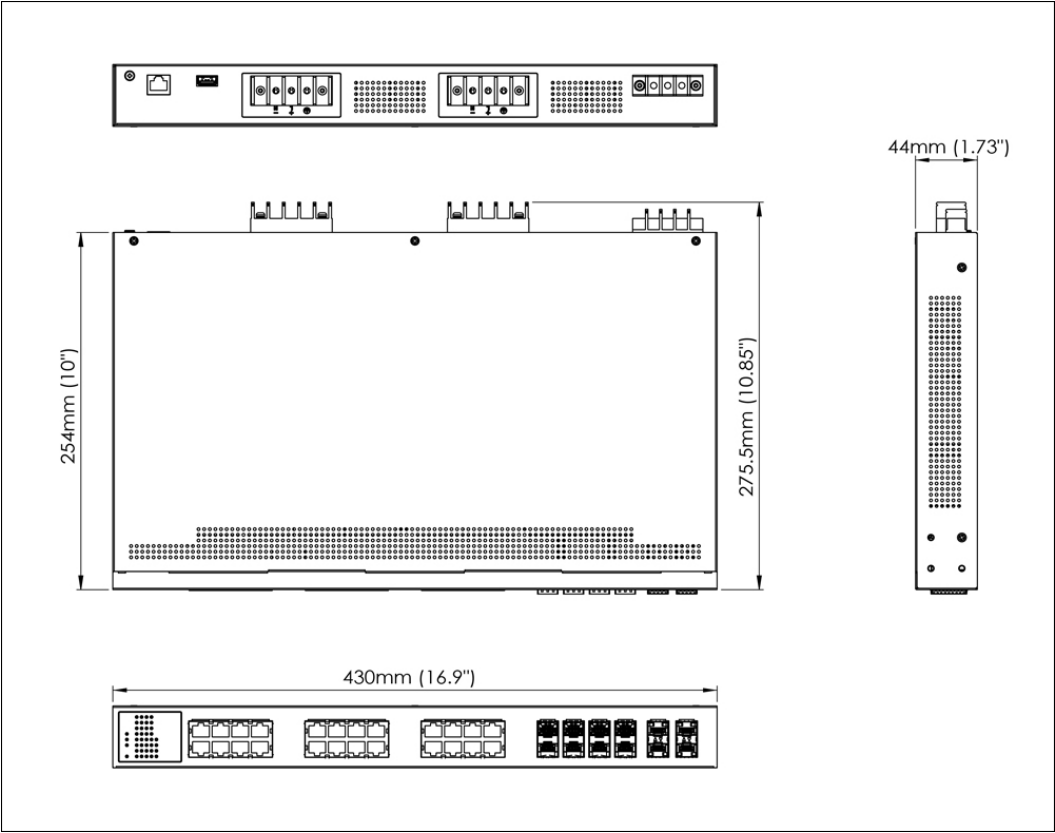

Application

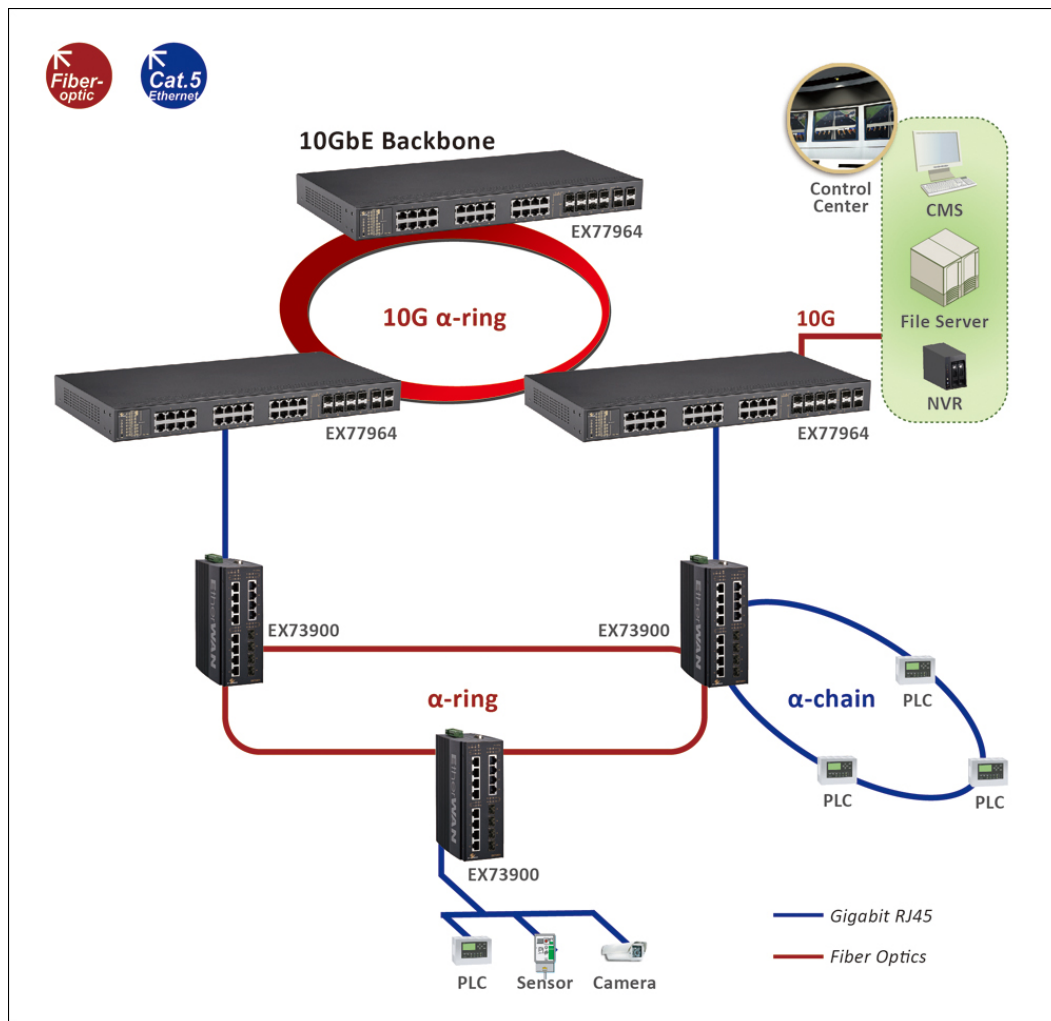


Software

Network Management

[eVue™ Network Configuration and Monitoring Tool](#)

Network Discovery

[eLite™ Network Discovery and IP Configuration Tool](#)

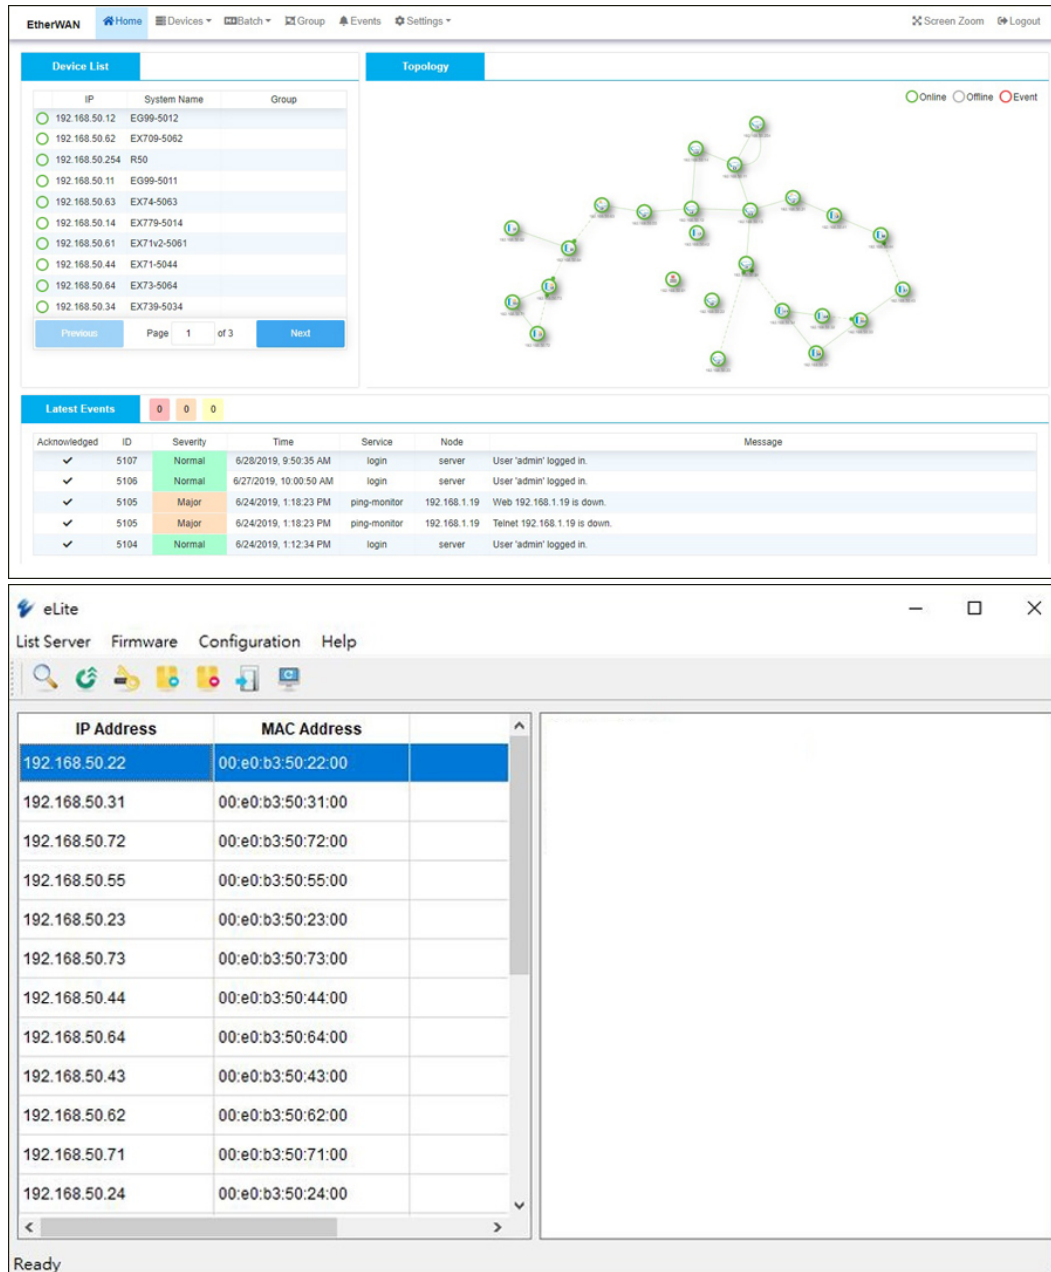

The screenshot displays the EtherWAN eLite Network Discovery and IP Configuration Tool interface. The top section shows the 'Device List' and 'Topology' views. The 'Device List' table lists various network devices with their IP addresses, system names, and groups. The 'Topology' view shows a network diagram with nodes and connections. Below these, the 'Latest Events' section displays a table of system events, including login attempts and ping monitor results. The bottom section shows the 'eLite' window with a table of IP addresses and MAC addresses, and a large empty area for configuration or monitoring.

IP	System Name	Group
192.168.50.12	EG99-5012	
192.168.50.62	EX709-5062	
192.168.50.254	R50	
192.168.50.11	EG99-5011	
192.168.50.63	EX74-5063	
192.168.50.14	EX779-5014	
192.168.50.61	EX71v2-5061	
192.168.50.44	EX71-5044	
192.168.50.64	EX73-5064	
192.168.50.34	EX739-5034	

Acknowledged	ID	Severity	Time	Service	Node	Message
✓	5107	Normal	6/29/2019, 9:50:35 AM	login	server	User 'admin' logged in.
✓	5106	Normal	6/27/2019, 10:00:50 AM	login	server	User 'admin' logged in.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Web 192.168.1.19 is down.
✓	5105	Major	6/24/2019, 1:18:23 PM	ping-monitor	192.168.1.19	Telnet 192.168.1.19 is down.
✓	5104	Normal	6/24/2019, 1:12:34 PM	login	server	User 'admin' logged in.

IP Address	MAC Address
192.168.50.22	00:e0:b3:50:22:00
192.168.50.31	00:e0:b3:50:31:00
192.168.50.72	00:e0:b3:50:72:00
192.168.50.55	00:e0:b3:50:55:00
192.168.50.23	00:e0:b3:50:23:00
192.168.50.73	00:e0:b3:50:73:00
192.168.50.44	00:e0:b3:50:44:00
192.168.50.64	00:e0:b3:50:64:00
192.168.50.43	00:e0:b3:50:43:00
192.168.50.62	00:e0:b3:50:62:00
192.168.50.71	00:e0:b3:50:71:00
192.168.50.24	00:e0:b3:50:24:00

Ordering Info

+ Model

EX77964-8VB	16-port 10/100/1000BASE-TX + 8-port 100/1000BASE SFP Combo + 4-port 1G/10G SFP+ (12-24VDC)
-------------	--

+ Accessories

Hardened 100BASE SFP Modules	www.etherwan.com/products/sfp-fiber-transceiver
Hardened Gigabit and 10-Gigabit SFP Modules	www.etherwan.com/products/sfp-fiber-transceiver
DIN-Rail Power Supplies	www.etherwan.com/products/din-rail-power-supply (*)
*Recommended Power Supply	HDR-60-24 60W 24VDC DIN-Rail Power Supply
EB-232	Configuration Backup and Restoration Tool

