

EX38000 Series

Industrial Web-smart 4 to 5-port 10/100BASE-TX and 1-port 100BASE-FX PoE+ Ethernet Switch



Overview

This product is discontinued as of 31th July 2021. Click [here](#) for alternative product.

EtherWAN's EX38000 Series provides an industrial 5-port switching platform supporting IEEE802.3af+ Power over Ethernet, high performance switching with robust management features required for mission-critical and harsh environments where sustained connectivity is crucial. The EX38000 Series is equipped with 4 10/100BASE-TX PoE ports, in combination with one 100FX Fiber options.

The IEEE802.3af+ PoE ports provide up to 30W/port with a total power budget of 120W, making the switch truly versatile for connecting with PoE Powered Devices (PD) with different bandwidth and power consumption requirements.

Users are able to access management features such as QoS based on 802.1p, DSCP, and IP precedence. With the hardened specifications, the EX38000 Series is designed to operate at -10 to 60°C in harsh environments.

EtherWAN — "When Connectivity is Crucial."

Spotlight

Industrial Grade

- » Supports -10 to 60°C (14 to 140°F) operating temperature

PoE Connectivity

- » Port 1 to 4 supports IEEE802.3af+ Power over Ethernet

Fiber Connectivity

- » Up to one 100BASE-FX ports with SC and ST options

Web-Managed Interface

- » Comprehensive QoS based on 802.1p, DSCP, and IP precedence

Specifications

Technology

Standards

- IEEE 802.3 10BASE-T
- IEEE 802.3u 100BASE-TX/100BASE-FX
- IEEE 802.3af Power over Ethernet
- IEEE 802.3x Full duplex and flow control

Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps

Packet Buffer Memory

- 512K bits

Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE 802.3x full-duplex flow control
- Auto MDI/MDIX

Address Table Size

- 1024 MAC addresses
-

Power

Input

- Redundant Power Inputs:
Terminal Block: 47-57VDC
DC Jack: 47-57VDC

Power Consumption

- Device: Max. 10W (without PoE)
- PoE Power Budget (Depends on Power Input): 120W Max.

PoE Technology

- Alternative B
- Pins 7/8(-), 4/5(+)

PoE Power Output

- Port 1 to 4
- IEEE 802.3af+: up to 30W/port, 47-57VDC, 600mA Max.

Protection

- Reverse Polarity Protection
 - Overload Current Protection
-

Mechanical

Casing

- Metal Case
- IP30

Dimensions

- 200 x 134.3 x 35mm (W x D x H)
(7.87" x 5.29" x 1.38")

Weight

- 0.8Kg (1.76lbs.)

Installation

- Desktop, Wall, or DIN-Rail mounting
-

Interface

Ethernet Ports

- 10/100BASE-TX: 4 or 5 ports
- 100BASE-FX: 0 or 1 port

LED Indicators

- Per Unit: Power 1, Power 2, Power 3 (Green), Fault (Red)
- Per Port: Link/Activity (Green)

Alarm Contact

- One relay output with current 1A/250VAC
-

Environment

Operating Temperature

- -10 to 60°C (14 to 140°F)
- Tested @ -20 to 70°C (-4 to 158°F)

Storage Temperature

- -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)
-

Regulatory Approvals

ISO

- Manufactured in an ISO 9001 facility

EMI

FCC Part 15B Class A

VCCI Class A

EN 61000-6-4

EN 61000-3-2

EN 61000-3-3

EN 55022 Class A

EMS

EN 61000-6-2

- EN 61000-4-2 (ESD Standards)
- EN 61000-4-3 (Radiated FRI Standards)
- EN 61000-4-4 (Burst Standards)
- EN 61000-4-5 (Surge Standards)
- EN 61000-4-6 (Induced RFI Standards)
- EN 61000-4-8 (Magnetic Field Standards)


Environmental Test Compliance

IEC 60068-2-6 Fc (Vibration)

IEC 60068-2-27 Ea (Shock)

FED STD 101C Method 5007.1 (Free fall w/package)

Dimensions

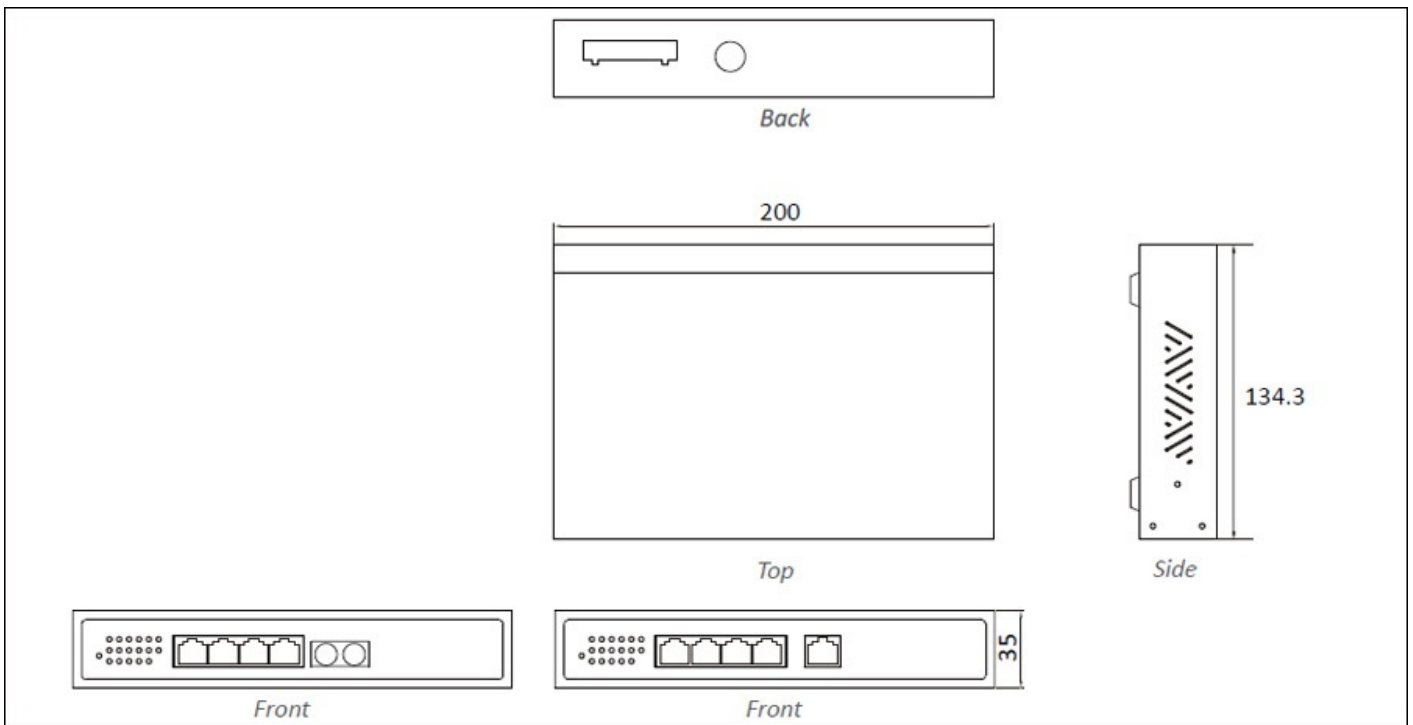

Ordering Info

Model

EX38050-00B	5-port 10/100BASE-TX PoE Industrial Web-smart Ethernet Switch
EX38041-X0B	4-port 10/100BASE-TX +1-port 100BASE-FX PoE Industrial Web-smart Ethernet Switch

100FX Fiber Options (X)

1	Multi Mode (SC) - 2Km
2	Multi Mode (ST) - 2Km
6	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-2Km
7	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-2Km
8	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-5Km
9	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-5Km
A	Single Mode (SC) - 20Km
B	Single Mode (SC) - 40Km
H	Single Mode (ST) - 20Km
P	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
Q	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
R	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-40Km
S	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-40Km

* More 100FX Fiber options also available upon request.

Optional Accessories

KD-AA78000X	DIN-Rail Mounting Kit
NDR-240-48	240W/5A DIN-Rail 48VDC Industrial Power Supply
SDR-480-48	480W/10A DIN-Rail 48VDC Industrial Power Supply



© EtherWAN Systems, Inc. All rights reserved. 20220919

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.