


EL1141 系列

IEC 61850/IEEE 1613 強固級10/100BASE-TX- 100BASE-FX 光電轉換器

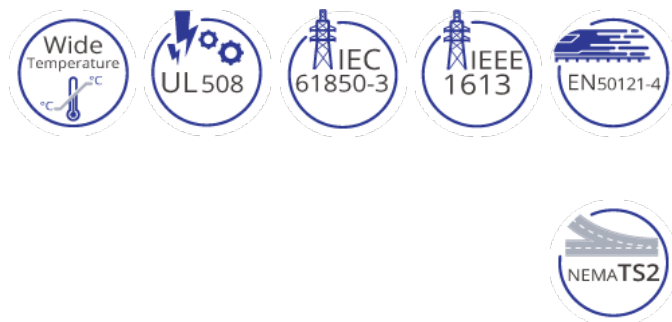

產品介紹

EL1141光電轉換器具備1組獨立10/100BASE-T網路埠和1個100BASE-SX-LX光纖埠，支援雙電源輸入、斷線告警、Link-Fault-Pass-Through等功能，符合IEC 61850-3/IEEE 1613相容認證，抗電磁干擾設計，適用於變電站、電力整合等應用市場。

EL1141光電轉換器採工業等級設計，可承受強力的落摔衝擊、防震動及抗電磁波干擾，更可在-40到75°C寬溫環境下穩定運作，於嚴峻的專案規劃布局中扮演致勝的關鍵角色。

EtherWAN — "When Connectivity is Crucial."

產品亮點

+ 符合IEC 61850-3/IEEE 1613認證

符合變電站自動化所需之應用標準

+ 強固等級設計

寬溫操作(-40到75°C)

+ 符合EN 50121-4認證

專為軌道環境應用設計及測試

+ 支援Link-Fault-Pass-Through (LFPT)

針對光電轉換器連線狀態提供持續的監控
當連線的其中一端光纖中斷訊，LFPT會中斷乙太網路(RJ-45)埠之連線，以告知連線之設備網路連線已中斷

產品規格

+ Technology

Standards

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX and 100BASE-FX

IEEE 802.3x Full duplex and flow control

Forward and Filtering Rate

14,880pps for 10Mbps

148,810pps for 100Mbps

Packet Buffer Memory

128K bits

Processing Type

Store-and-forward

Auto Negotiation

Half-Duplex back-pressure and IEEE 802.3x Full-Duplex flow control

Auto MDI/MDIX

+ Interface

Ethernet Ports

10/100BASE-TX: 1 ports

100BASE-FX: 1 ports

LED Indicators

Per Unit: Power 1, Power 2, Fault, Link-Fault-Pass-Through

Per port 10/100TX: Link/Activity, Full-duplex/Collision, Speed

Per port 100FX: Link/Activity, Full-duplex/Collision

Relay Contact

Relay contact rating with current 1A @ 30VDC, 0.5A @ 120VAC

+ Environment

Operating Temperature

-40 to 75°C (-40 to 167°F)

Storage Temperature

-40 to 85°C (-40 to 185°F)

Ambient Relative Humidity

5% to 95% (non-condensing)

+ Power

Input

12 to 48VDC (Terminal Block)
12VDC (DC Jack)

Power Consumption

12 to 48VDC, 0.24 to 0.06A
2.88W Max.

Protection

Overload Current Protection
Reverse Polarity Protection

+ Mechanical

Casing

Aluminum Case
IP30

Dimensions

50mm (W) x 110mm (D) x 135mm (H)
(1.97" (W) x 4.33" (D) x 5.31" (H))

Weight

0.8Kg (1.76lbs.)

Installation

DIN-Rail (top hat type 35mm) or panel mounting

+ Regulatory Approvals

ISO

Manufactured in an ISO 9001 facility

Safety

UL508
UL62368-1

EMI

FCC Part 15B Class A
EN 55022
EN 61000-6-4
EN 55022
EN 61000-3-2
EN 61000-3-3

EMS

EN 61000-6-2
• EN 61000-4-2 (ESD Standards)
• EN 61000-4-3 (Radiated FRI Standards)
• EN 61000-4-4 (Burst Standards)
• EN 61000-4-5 (Surge Standards)
• EN 61000-4-6 (Induced RFI Standards)
• EN 61000-4-8 (Magnetic Field Standards)


Environmental Test Compliances

IEC 60068-2-6 Fc (Vibration)
IEC 60068-2-27 Ea (Shock)
FED STD 101C Method 5007.1 (Free fall w/ package)


Industrial Compliance

IEC61850-3 / IEEE1613
EN50121-4
NEMA TS2

產品應用圖

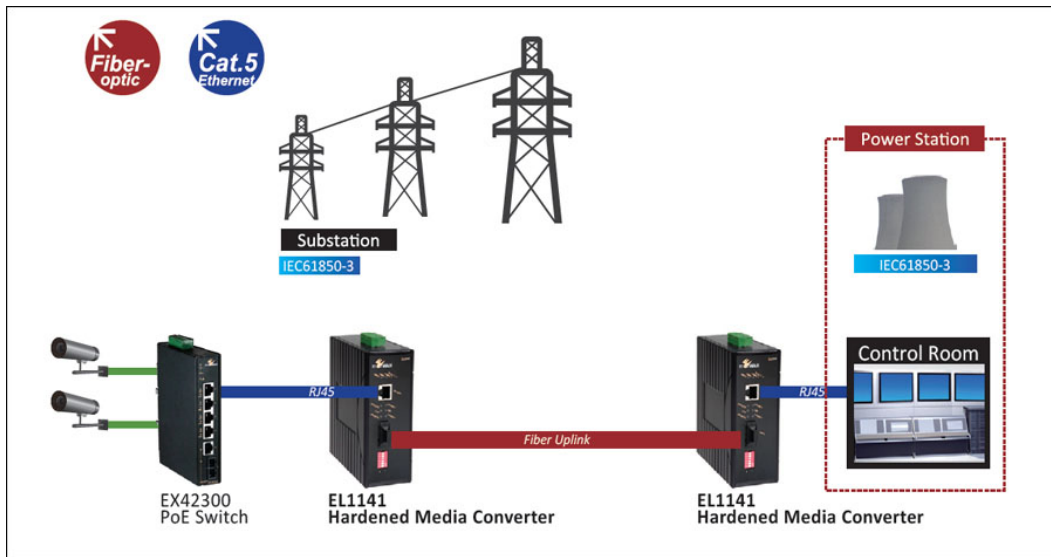

產品尺寸圖

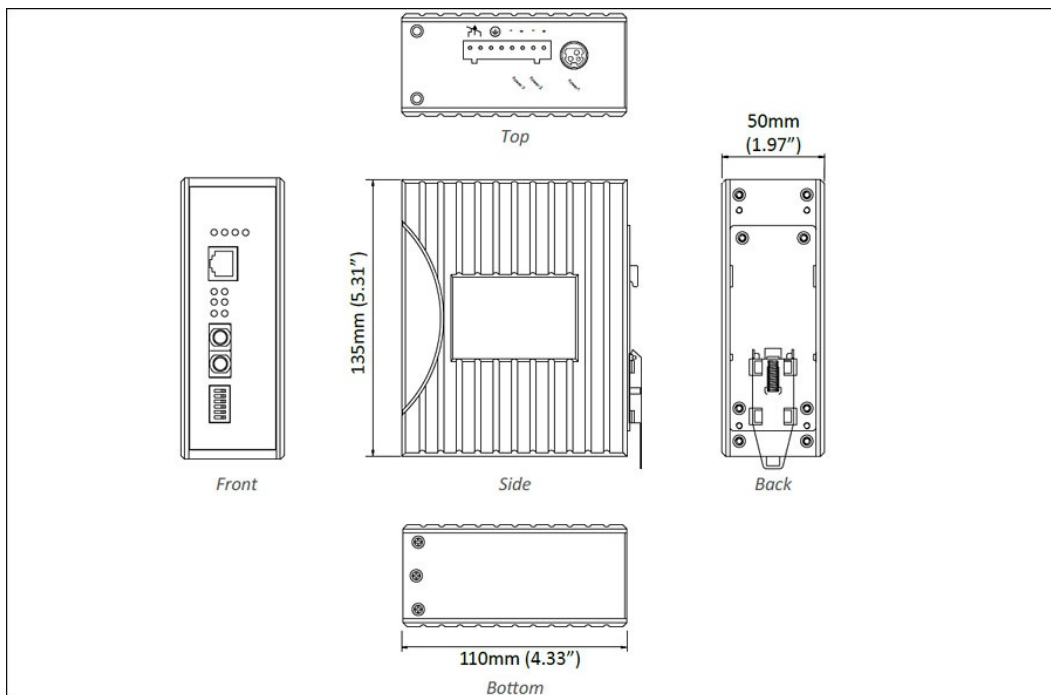

訂購型號

+ 型號

EL1141-X0B	10/100BASE-TX to 100BASE-FX Hardened Media Converter
-------------------	--

* DIN-Rail mounting kit included.

+ 100FX Fiber Options (X)

1	Multi Mode (SC) - 2Km (1310nm)
2	Multi Mode (ST) - 2Km (1310nm)
A	Single Mode (SC) - 20Km (1310nm)
B	Single Mode (SC) - 40Km (1310nm)
H	Single Mode (ST) - 20Km (1310nm)
6	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-2Km
7	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-2Km
8	Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-5Km
9	Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-5Km
P	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km
Q	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km
R	Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-40Km
S	Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-40Km

* More 100FX Fiber options also available upon request.

+ Optional Accessories

KP-AA96-480	Panel mounting kit
HDR-30-24	30W/1.5A DIN-Rail 24VDC Industrial Power Supply
HDR-60-24	60W/2.5A DIN-Rail 24VDC Industrial Power Supply
EDR-75-24	75W/3.2A DIN-Rail 24VDC Industrial Power Supply
EX41-145046-X	Power Supply 45W 12VDC with Open Wire (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA



© EtherWAN Systems, Inc. All rights reserved. 20250506

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.