


EX42011 系列

工業級 10/100BASE-TX- 100BASE-FX 光電轉換器



產品介紹

EX42011系列為輕薄型設計，工業級鋁軌式安裝光電轉換器，具備1個10/100BASE以太網路連接搭配1個100BASE-FX光纖埠，產品隨插即用，支援熱插拔，不須額外設定。

EX42011系列支援4kV突波防護，符合EN 61000-4-5標準，工業等級設計可承受強力的落摔衝擊、防震動及抗電磁波干擾可在-10到60°C寬溫環境下穩定運作，其輕巧外型設計針對工廠、倉庫和沒有氣溫控制的場域應用是最佳解決方案。

EtherWAN — "When Connectivity is Crucial."

產品亮點

+ 簡易安裝方式

隨插即用

+ 高突波防護設計

支援4kV突波防護符合EN 61000-4-5標準

+ 電源輸入範圍

支援電源輸入範圍12-48VDC

產品規格

+ Technology

Standards

IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX and 100BASE-FX
IEEE 802.3x Full duplex and flow control

Forward and Filtering Rate

14,880pps for 10Mbps
148,810pps for 100Mbps

Packet Buffer Memory

448K bits

Processing Type

Store-and-forward
Auto Negotiation
Half-Duplex back-pressure and IEEE 802.3x Full-Duplex flow control
Auto MDI/MDIX

+ Interface

Ethernet Ports

10/100BASE-TX: 1 ports
100BASE-FX: 1 ports

LED Indicators

Per Unit: Power 1
Per port: Link/Activity (Green), Speed (Yellow)

+ Environment

Operating Temperature

-10 to 60°C (14 to 140°F)
Tested @ -20 to 70°C (-4 to 158°F)

Storage Temperature

-25 to 85°C (-13 to 185°F)

Ambient Relative Humidity

5% to 95% (non-condensing)

+ Power

Input

12 to 48VDC (Terminal Block)

Power Consumption

1.82W Max.
 0.14A@12VDC,
 0.07A@24VDC
 0.038A@48VDC

Protection

Reverse Polarity Protection

+ Mechanical

Casing

Aluminum Case
 IP30

Dimensions

26 x 70 x 110mm (W x D x H)
 (1.02" x 2.76" x 4.33")

Weight

0.2Kg (0.44bs.)

Installation

DIN-Rail (top hat type 35mm) or panel mounting

+ Regulatory Approvals

ISO

Manufactured in an ISO 9001 facility

Safety

UL 62368

EMI

FCC Part 15B Class A
 VCCI Class A
 EN 61000-3-2
 EN 61000-3-3
 EN 61000-6-4


EMS

EN 61000-6-2
 • EN 61000-4-2 (ESD Standards)
 • EN 61000-4-3 (Radiated FRI Standards)
 • EN 61000-4-4 (Burst Standards)
 • EN 61000-4-5 (Surge Standards)
Signal ports: ±4kV line-to-ground
 • EN 61000-4-6 (Induced RFI Standards)
 • EN 61000-4-8 (Magnetic Field Standards)


Environmental Test Compliances

IEC 60068-2-6 Fc (Vibration)
 IEC 60068-2-27 Ea (Shock)
 FED STD 101C Method 5007.1 (Free fall w/ package)

產品應用圖

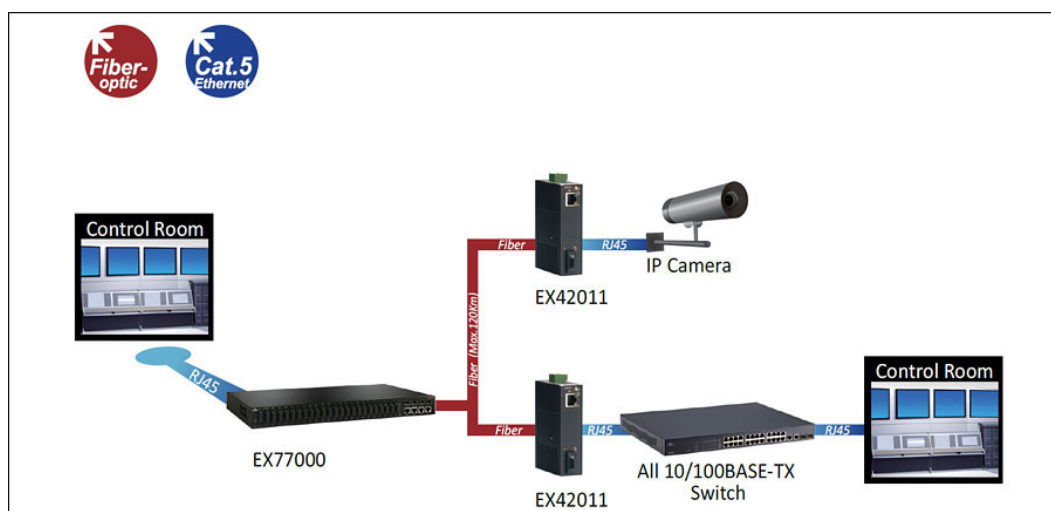

產品尺寸圖

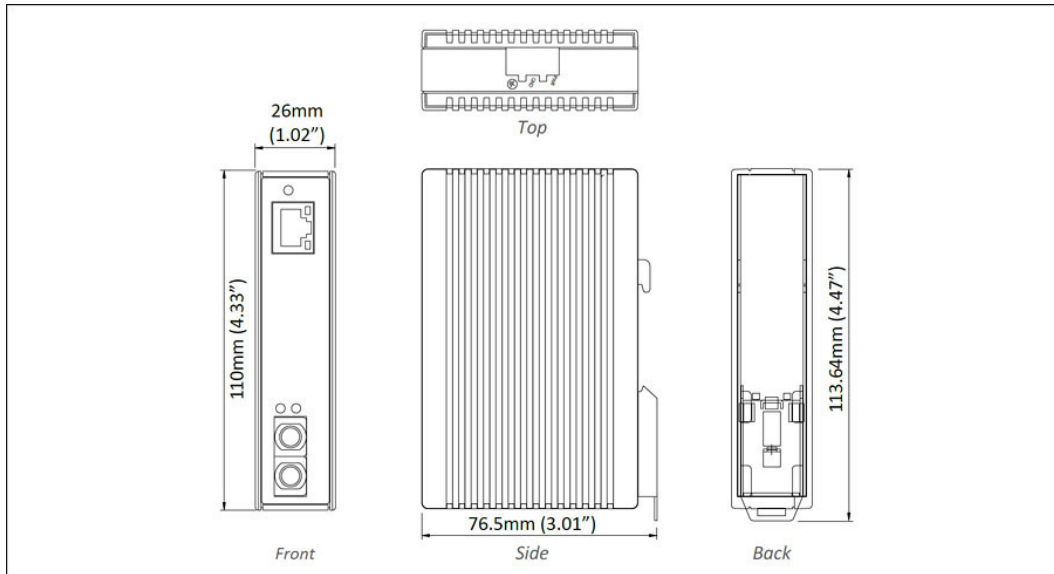

訂購型號

+ 型號

| | |
|-----------------------|--|
| EX42011-XY-1-A | 10/100BASE-TX to 100BASE-FX Industrial Media Converter with 4kV surge protection |
|-----------------------|--|

* DIN-Rail mounting kit included.

+ 100FX Fiber Options (XY)

| | |
|-----------|---|
| 1A | Multi Mode (SC) - 2Km (1310nm) |
| 1B | Multi Mode (ST) - 2Km (1310nm) |
| 2A | Single Mode (SC) - 20Km (1310nm) |
| 2B | Single Mode (SC) - 40Km (1310nm) |
| 2D | Single Mode (ST) - 20Km (1310nm) |
| 1H | Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-2Km |
| 1J | Multi Mode (SC) WDM-TX: 1310nm/RX: 1550nm-5Km |
| 2E | Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-20Km |
| 2F | Single Mode (SC) WDM-TX: 1310nm/RX: 1550nm-40Km |
| 1I | Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-2Km |
| 1K | Multi Mode (SC) WDM-TX: 1550nm/RX: 1310nm-5Km |
| 2G | Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-20Km |
| 2H | Single Mode (SC) WDM-TX: 1550nm/RX: 1310nm-40Km |

* More 100FX Fiber options also available upon request.

+ Optional Accessories

| | |
|----------------------|---|
| HDR-30-24 | 30W/1.5A DIN-Rail 24VDC Industrial Power Supply |
| HDR-60-24 | 60W/2.5A DIN-Rail 24VDC Industrial Power Supply |
| EDR-75-24 | 75W/3.2A DIN-Rail 24VDC Industrial Power Supply |
| EDR-120-24 | 120W/5A DIN-Rail 24VDC Industrial Power Supply |
| EX41-145046-X | Power Supply 45W 12VDC with Open Wire (X) = 1: US, 2: EU, 3: UK, 4: AU, 5: JP, 6: SA |

