EL2326 系列

OAM網管型10/100/1000BASE-TX - 100/1000BASE-X Dual Rate光電轉換器



產品介紹

本產品自2020年10月1日起停產。 請點選 此處 尋找替代產品。

The EL2326 Series provides media conversion between 10/100/1000BASE-T(X) and 100-FX Fiber or 1000BASE-SX/LX Fiber. EL2326's fiber design is compatible to 100BASE fiber or 1000BASE fiber transceiver.

The EL2326 managed media converter supports Telnet, SNMP v1/v2, and web browser management, enabling valueadded connectivity and bandwidth control. Key features include; IEEE802.3ah OAM compliance, VLAN tagging, broadcast storm protection, Far-End-Fault, and Link-Fault-Pass-Through resulting in reliable communications between networks.

With link down alarming and a wide range of fiber connectivity options, the EL2326 is the ideal managed media converter for industrial environments where connectivity is crucial.

EtherWAN — "When Connectivity is Crucial."

產品亮點

Gigabit Connectivity

» Auto 10/100/1000BASE-T X and 1000BASE-SX/LX/BX Ethernet transmission conversion
» 1000Mbps Full duplex, 10/100MBps Full/Half duplex
» Fiber interface supports dual rate 100BASE-FX and 1000BASE-SX/LX fiber transmission

Managed Functions

» Supports IEEE 802.3ah OAM standards
» Supports SNMPv1, SNMPv2
» Supports bandwidth control and VLAN base priority tag

Built-in Fiber Tray

產品特色

Management

» Interface
  • Web Browser
  • SNMP v1/v2c/v3
» Firmware and configuration upgrade and backup via TFTP
» Supports DHCP Server/Client
» RMON (Remote monitoring): group 1, 2, 3, 9

Security

» MAC Address by port security
» Enable/disable port
» Storm control (broadcast and multicast types)
» IEEE802.1x LAN access control
» Remote authentication through RADIUS
» SSL for web security

Quality of Service (QoS)

» Priority Queues: 4 queues per port
» Traffic classification based on IEEE802.1p CoS, DSCP, WRR (Weighted round robin)
» Rate Limiting (Ingress/Egress)

Layer 2 Features

» Auto-negotiation for port speed and duplex mode
» Flow Control
  • IEEE802.3x full duplex mode
  • Back-Pressure half duplex mode
» VLANs
  • Port-based VLANs

- IEEE802.1Q Tag VLANs (4096 VID)
- GVRP (GARP VLAN Registration Protocol)
- GMRP (GARP Multicast Registration Protocol)

» IGMP Snooping

- IGMP snooping v1/v2/v3

» Jumbo Frame

- Gigabit transmission supports 9K bytes jumbo frame

產品規格

Technology

Standards

• IEEE802.3 10BASE-T
• IEEE802.3u 100BASE-TX/100BASE-FX
• IEEE802.3ab 1000BASE-T
• IEEE802.3z 1000BASE-SX/1000BASE-LX
• IEEE802.3x full duplex and flow control

Forward and Filtering Rate

• 14,880pps for 10Mbps
• 148,810pps for 100Mbps
• 1,488,100pps for 1000Mbps

Processing Type

• Store-and-Forward
• Auto Negotiation
• Half duplex back-pressure and IEEE802.3x full-duplex flow control
• Auto-MDI/MDIX

Power

Input Voltage

• 12VDC

Power Consumption

• 3W Max. 0.25A @ 12VDC

Mechanical

Casing

• Metal case
• IP30

Dimensions

• 100 mm (W) x 122mm (D) x 32.5mm (H)
(3.94"(W) x 4.8" (D) x 1.28" (H))

Weight
• 350g (0.77lbs.)

Installation
• Wall mounting

Interface

Ethernet Port
• 10/100/1000BASE-TX: 1 port
• 100/1000BASE SFP slot: 1 port

LED Indicators
• Per Unit: Power Status, OAM loop
• Per Port: FX/TX Speed, Link/Activity, Full-duplex

Environment

Operating Temperature
• -5°C to 55°C (-23°F to 131°C)

Storage Temperature
• -20°C to 70°C (-4°F to 158°F)

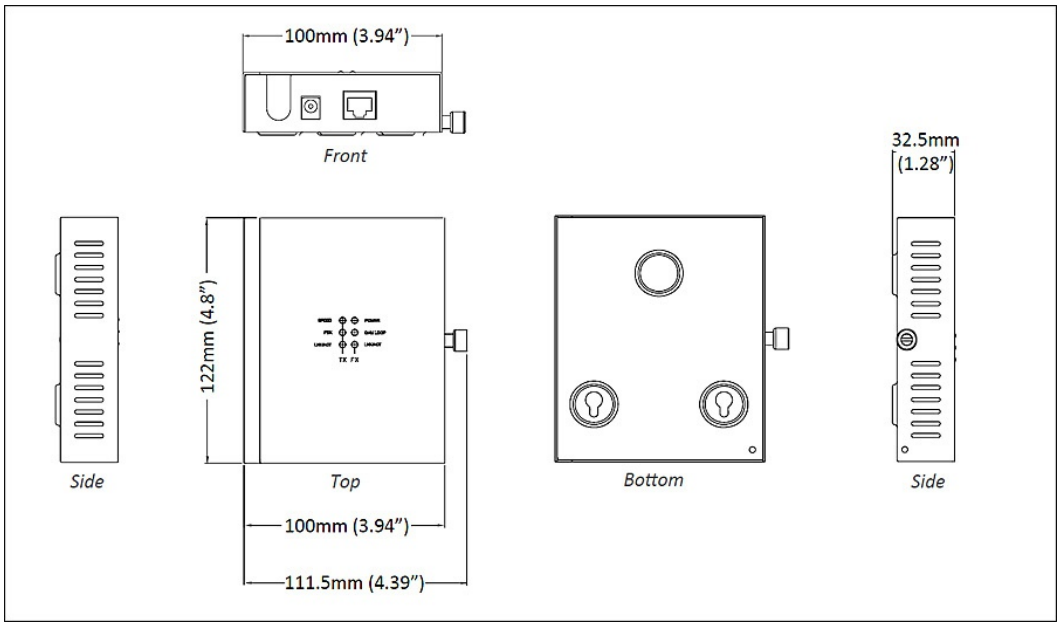
Ambient Relative Humidity
• 5% to 95% (non-condensing)

Regulatory Approvals

ISO
• Manufactured in an ISO9001 facility

Emission Compliance
CE Mark Class A
FCC Part 15B Class A
VCCI Class A

產品尺寸圖


100mm (3.94")
Front
32.5mm
(1.28")
122mm (4.8")
Side
Top
Bottom
Side
100mm (3.94")
111.5mm (4.39")

訂購型號

Model

EL2326-X1Z	10/100/1000BASE-TX to 100/1000BASE-X Dual Rate OAM Managed Media Converter

Gigabit Port Options (X)

3	1000BASE-SX (SC) - 550m
4	1000BASE-SX (SC) - 2Km
5	1000BASE-SX (ST) - 550Km
A	1000BASE-LX (SC) - 10Km
B	1000BASE-LX (SC) - 20Km
E	1000BASE-LX (SC) - 40Km (1310nm)
R	1000BASE-BX (SC) WDM – TX: 1310nm/RX: 1550nm-20Km
S	1000BASE-BX (SC) WDM – TX: 1550nm/RX: 1310nm-20Km

Power Adapter Options (Z)

A	with external power adapter for AU
E	with external power adapter for EU
J	with external power adapter for JP
K	with external power adapter for UK
U	with external power adapter for USA
3C	with external power adapter for China

© EtherWAN Systems, Inc. All rights reserved. 20260107
EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.