

EL2211 系列

10/100/1000BASE-TX - 1000BASE-SX/LX/BX光電轉換器



產品介紹

EL2211系列提供10/100/1000BASE-TX與1000BASE-SX/LX/BX光電轉換；透過DIP Switch指撥器，可以開關LFPT功能,能針對光電轉換器連線狀態提供持續有效的監控。

EL2211採散熱性極佳的鋁製外殼設計，可支援0°C到50°C寬溫操作，提供Gigabit高速傳輸速率，支援9K bytes Jumbo Frame,可壁掛或搭配益網

[EMC1600](#)(19吋標準機箱)集中收容管理。

EtherWAN — "When Connectivity is Crucial."

產品亮點

+ 支援全Gigabit頻寬及Jumbo frames

10/100/1000BASE-TX 和 1000BASE-SX/LX/BX 乙太網信號自動轉換

1000Mbps 全雙工，10/100Mbps 全/半雙工。

+ 可搭配多埠型光電轉換器收容箱使用

可支援壁上安裝或EtherWAN EMC1600 chassis收容式機箱安裝並支援雙備援電源輸入

+ 支援Link-Fault-Pass-Through (LFPT)

針對光電轉換器連線狀態提供持續的監控

當連線的其中一端光纖中斷訊，LFPT會中斷乙太網路(RJ-45)埠之連線，以告知連線之設備網路連線已中斷

產品規格

+ 介面

乙太網路埠

10/100/1000BASE-TX: 1 port

1000BASE-SX/LX/BX: 1 port

LED 指示燈號

Per Unit: Power, LFPT

Per Port: Link/Activity, Speed

+ 技術

標準

IEEE 802.3 10BASE-T

IEEE 802.3u 100BASE-TX

IEEE 802.3ab 1000BASE-T

IEEE 802.3z 1000BASE-SX/1000BASE-LX

IEEE 802.3x Full duplex and flow control

Forward/Filtering Rate

14,880pps for 10Mbps

148,810pps for 100Mbps

1,488,100pps for 1000Mbps

傳輸型式

Store-and-forward

Half-duplex back-pressure and IEEE 802.3x full-duplex flow control

Auto-negotiation

Auto MDI/MDIX

+ 電源

輸入電壓

12VDC

電力功耗

1.8W Max. 0.15A@12VDC

+ 機構**機殼**

Aluminum

尺寸

80.3 x 109.2 x 23.8mm (W x D x H)

3.16" x 4.30" x 0.94"

重量

0.15kg (0.33lbs)

安裝方式

Wall mounting, or in EMC1600 Chassis System

+ 環境**工作溫度**

0 to 50°C (32 to 122°F)

儲存溫度

-10 to 70°C (-14 to 158°F)

工作濕度

5% to 95% (無凝結)

+ 通過認證**ISO**

Manufactured in ISO-9001 facility

Safety

UL 60950-1

Emission Compliance

CE Mark Class A

FCC Part 15B Class A

VCCI Class A

+ 保固**Length**

Limited Lifetime

Details

www.etherwan.com/support/warranty-policy

+ What's Included**Device**


Media Converter

Power


12VDC Power Adapter

Documentation

產品應用圖

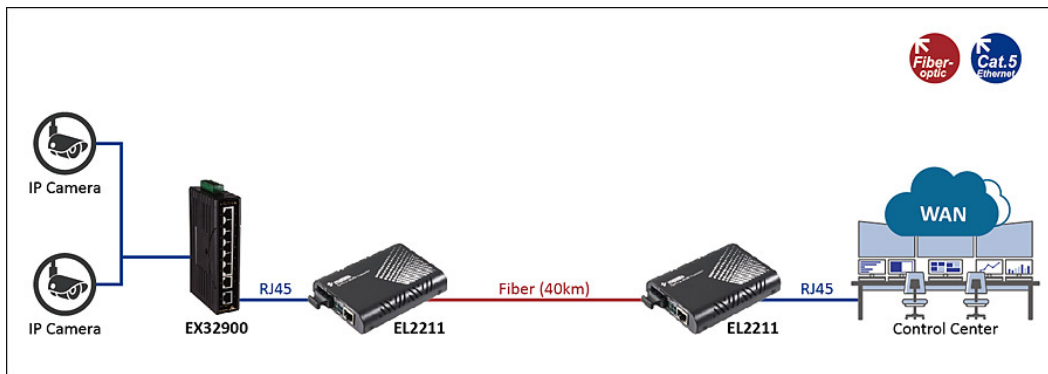

產品尺寸圖

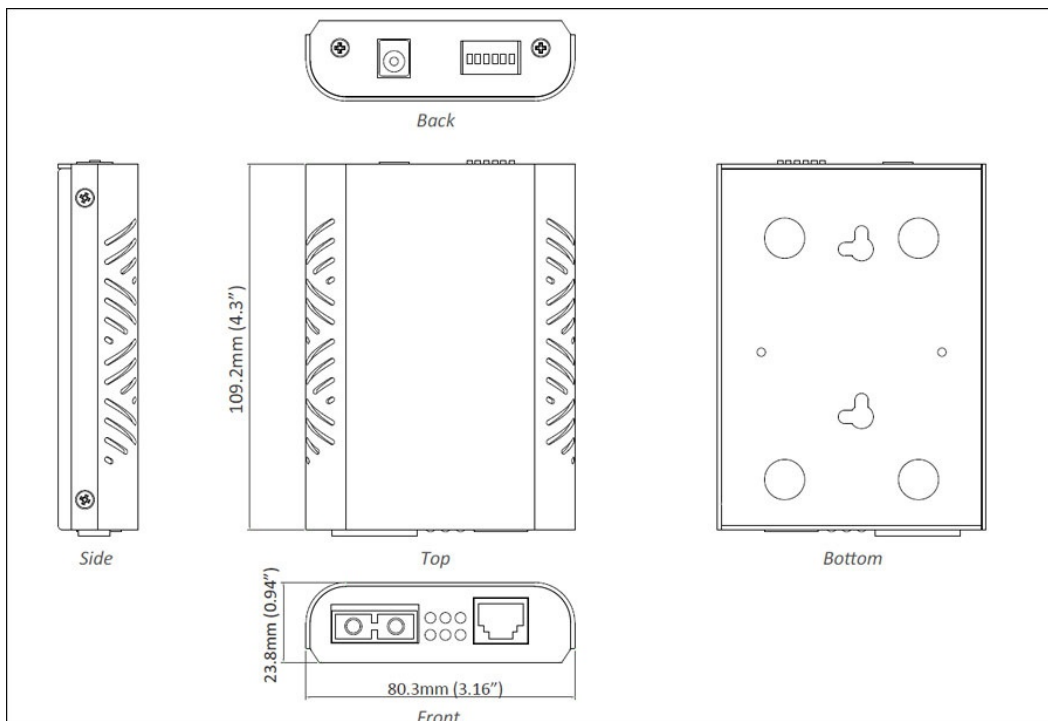

訂購型號

+ 型號

EL2211-X1 10/100/1000BASE-TX to 1000BASE-X Media Converter

Note: Shipment comes along with universal adapter; US (JP) /EU/UK plugs are included.

+ Gigabit Port Options (X)

3 1000BASE-SX (SC) - 550m (850nm)

4 1000BASE-SX (SC) - 2Km (1310nm)

5 1000BASE-SX (ST) - 550m (850nm)

A 1000BASE-LX (SC) - 10Km

B 1000BASE-LX (SC) - 20Km (1310nm)

E 1000BASE-LX (SC) - 40Km (1310nm)

R 1000BASE-BX (SC) WDM-TX: 1310nm/RX: 1550nm-20Km

S 1000BASE-BX (SC) WDM-TX: 1550nm/RX: 1310nm-20Km

+ Accessories

Multiple Channel Chassis www.etherwan.com/products/media-converters/multiple-channel-media-converters

