

EM1000S/EM2000S 系列

1000BASE-SX/LX - 1000BASE-LX/BX光電轉換器



產品介紹

The EM1000S/EM2000S Series provides media conversion between 1000BASE-T(X) and 1000BASE-FX Fiber. Easy plug-and-play design facilitates network infrastructure construction. Also, this commercial grade Gigabit media converter supports EtherWAN EMC1600 chassis system for easy group installation. The EM1000S/EM2000S is the ideal media converter for enterprise environments.

EtherWAN — "When Connectivity is Crucial."

產品亮點

Gigabit Connectivity

- » 1000BASE-SX/LX/BX to 1000BASE-SX/LX/BX fiber transmission conversion
- » 1000Mbps Full duplex
- » Full wire-speed forwarding rate

Optional Chassis System

- » Supports wall mounting or EtherWAN's EMC1600 chassis system for easy group installation with power redundancy

產品規格

Technology

Standards

- IEEE802.3ab, 1000BASE-T
- IEEE802.3z, 1000BASE-SX/1000BASE-LX
- IEEE802.3x, Full duplex and flow control

Forward and Filtering Rate

- 1,488,100pps for 1000Mbps

Processing Type

- Auto Negotiation
 - Auto MDI/MDIX
-

Power

Power Input

- Input Voltage: 12VDC

Power Consumption

- 2.4W Max. 0.2A @ 12VDC
-

Mechanical

Casing

- Aluminum Case

Dimensions

- 80.3mm (W) x 109.2mm (D) x 23.8mm (H)
(3.16" (W) x 4.3" (D) x 0.94" (H))

Weight

- 150g (0.336lbs.)

Installation

- Wall mounting or use with EMC1600 media converter chassis system
-

Interface

Ethernet Port

- 1000BASE-SX/LX/BX: 2 ports

LED Indicators

- Per Unit: Power Status (Power)
 - Per Port: 1000SX/LX: Link
-

Environment

Operating Temperature

- 0°C to 45°C (32°F to 113°F)

Storage Temperature

- -10°C to 70°C (14°F to 158°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)
-

Regulatory Approvals

ISO

- Manufactured in an ISO9001 facility


Emission Compliances

CE Mark Class A

FCC Part 15B Class A

VCCI Class A

產品尺寸圖

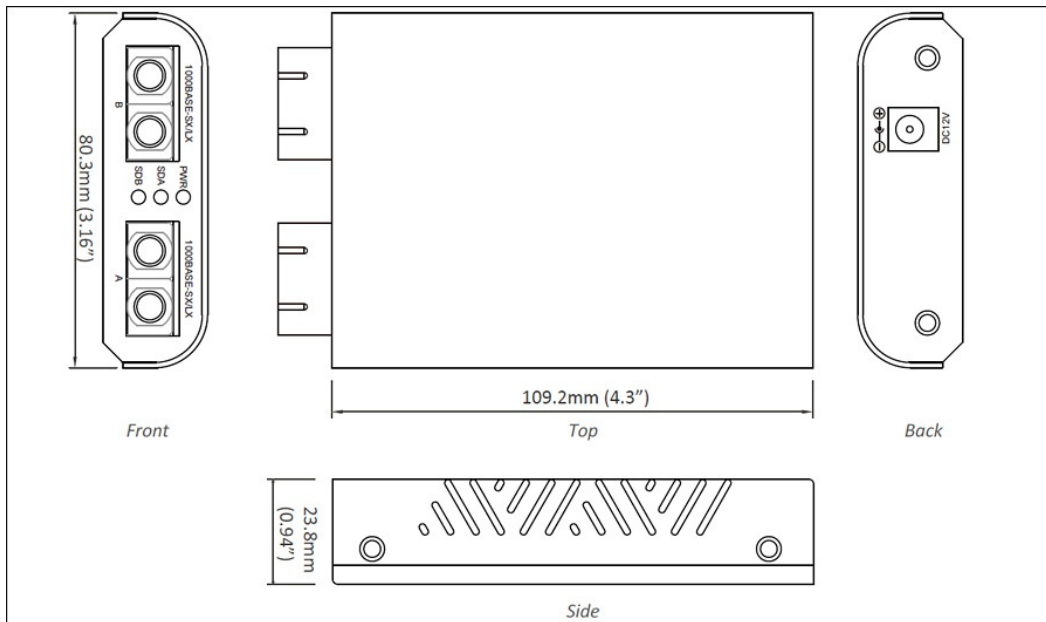

訂購型號

Model

EM1000SLC-10	1000BASE-SX(SC)-550m to 1000BASE-LX(SC)-10Km Media Converter (1310nm)
EM1000SLC-20	1000BASE-SX(SC)-550m to 1000BASE-LX(SC)-20Km Media Converter (1310nm)
EM2000SLCA-20	1000BASE-SX(SC)-550m to 1000BASE-BX(SC)WDM-TX:1310nm/RX:1550nm-20Km Media Converter
EM2000SLCB-20	1000BASE-SX(SC)-550m to 1000BASE-BX(SC)WDM-TX:1550nm/RX:1310nm-20Km Media Converter
EM2000SLCA-60	1000BASE-SX(SC)-550m to 1000BASE-BX(SC)WDM-TX:1310nm/RX:1550nm-60Km Media Converter
EM2000SLCB-60	1000BASE-SX(SC)-550m to 1000BASE-BX(SC)WDM-TX:1550nm/RX:1310nm-60Km Media Converter

* EMC1600 (available separately), a proprietary 19" chassis system, can house up to 16xEM1000S/EM2000S Series media converters.

* More Gigabit fiber options are available upon request.

* 1000BASE-LX to 1000BASE-LX converters are also available.



© EtherWAN Systems, Inc. All rights reserved. 20260107

EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.