

## EX45900 系列

強固級非網管 5 埠10/100/1000BASE (4 x PoE) +1 埠1000BASE-X Gigabit 乙太網路交換器



### 產品介紹

EX45900系列為強固級非網管PoE鋁軌式安裝乙太網路交換器，4埠支援PoE(IEEE 802.3at)及1個Gigabit光纖埠，支援遠距離傳輸。

EX45900系列屬非網管機型，支援10K Jumbo Frame、full wire Gigabit throughput、QoS，並符合eco-friendly IEEE 802.3az EEE (Energy Efficient Ethernet)標準。支援IEEE 802.3x自動協商功能、全雙工/半雙工流量控制、自動MDI/MDI-X跳線偵測、線性、無阻塞傳輸,無風扇設計。當電源故障或通訊中斷，可經由繼電器輸出警報，幫助現場人員快速診斷並排除異常。

其PoE網路埠，每埠最高可支援30W，總供電瓦數為120W，可廣泛應用於許多終端受電(PD)設備，例如PTZ球型攝影機、無線基地台及軌旁通訊設備等。EX45900系列專為嚴苛戶外環境設計打造，可在-40到75°C寬溫環境下穩定運作，於嚴苛的專案規劃佈局中扮演致勝的關鍵角色。

EtherWAN — "When Connectivity is Crucial."

### 產品亮點

#### + PoE連接

1-4埠支援IEEE 802.3at PoE供電標準，每埠最高可達30W

#### + 光纖介面連接

最高支援1個1000BASE-FX埠，彈性搭配SC、ST或SFP組合

#### + 符合Energy Efficient Ethernet (EEE)

支援IEEE 802.3az標準

## 產品規格

### + 技術

#### 標準

IEEE 802.3 10BASE-T  
IEEE 802.3u 100BASE-TX/100BASE-FX  
IEEE 802.3ab 1000BASE-T  
IEEE 802.3z 1000BASE-SX/1000BASE-LX  
IEEE 802.3x Full duplex flow control  
IEEE 802.3az Energy Efficient Ethernet  
IEEE 802.1p Quality of Service (QoS)  
IEEE 802.3af/at Power over Ethernet (PoE)

#### Forward and Filtering Rate

14,880pps for 10Mbps  
148,810pps for 100Mbps  
1,488,100pps for 1000Mbps

#### 緩衝記憶體封包

1M bits

#### 傳輸型式

Store-and-Forward  
Auto Negotiation  
Half-duplex back-pressure and IEEE 802.3x full-duplex flow control  
Auto MDI/MDIX

#### 巨大封包

10K bytes

#### MAC地址表

8192 MAC addresses

### + 介面

#### 乙太網路埠

10/100/1000BASE-TX: 5 ports  
1000BASE-X: 0 or 1 ports

#### LED 指示燈號

Per Unit: Power 1 (Green), Power 2 (Green), Alarm (Red)  
Per Port: 10/100M (Green), 1000M (Amber)  
Per PoE Port: PoE Status (Amber)

#### DIP Switches

Enable/Disable Port fault alarm  
Enable/Disable Broadcast Storm Protection  
Enable/Disable Jumbo Frame

#### Alarm Contact

One relay output with current 1A/250VAC  
Supports normal open

### + 環境

#### 工作溫度

-40 to 75°C (-40 to 167°F);  
Tested @ -40 to 85°C (-40 to 185°F)

#### 儲存溫度

-40 to 85°C (-40 to 185°F)

#### 工作濕度

5% to 95% (non-condensing)

## + 電源

### 輸入電壓

18-57VDC

### 電力功耗

Device: Max. 7W (Without PoE)

PoE Power Budget: 120W

### PoE Technology

Alternative A

Pins 1/2(+), 3/6(-)

### Protection

Reverse polarity protection

## + 機構

### 機殼

金屬材質

IP30

### 尺寸

30 x 100 x 149mm (W x D x H)  
(1.18" x 4" x 5.96")

### 重量

0.34Kg (0.75lb.)

### 安裝方式

DIN-Rail

## + 通過認證

### ISO

Manufactured in an ISO 9001 facility

### Safety

UL 60950

UL 61010 (EX42305/EX42315-V only)

### EMI

FCC Part 15B Class A

VCCI Class A

EN 61000-6-4

EN 61000-3-2

EN 61000-3-3

EN 55022 Class A

### EMS

EN 61000-6-2

-EN 61000-4-2 (ESD Standards)

-EN 61000-4-3 (Radiated RFI Standards)

-EN 61000-4-4 (Burst Standards)

-EN 61000-4-5 (Surge Standards)

-EN 61000-4-6 (Induced RFI Standards)

-EN 61000-4-8 (Magnetic Field Standards)


### Environmental Test Compliances

IEC 60068-2-6 Fc (Vibration)

IEC 60068-2-27 Ea (Shock)

FED STD 101C Method 5007.1 (Free fall w/package)

## 產品尺寸圖

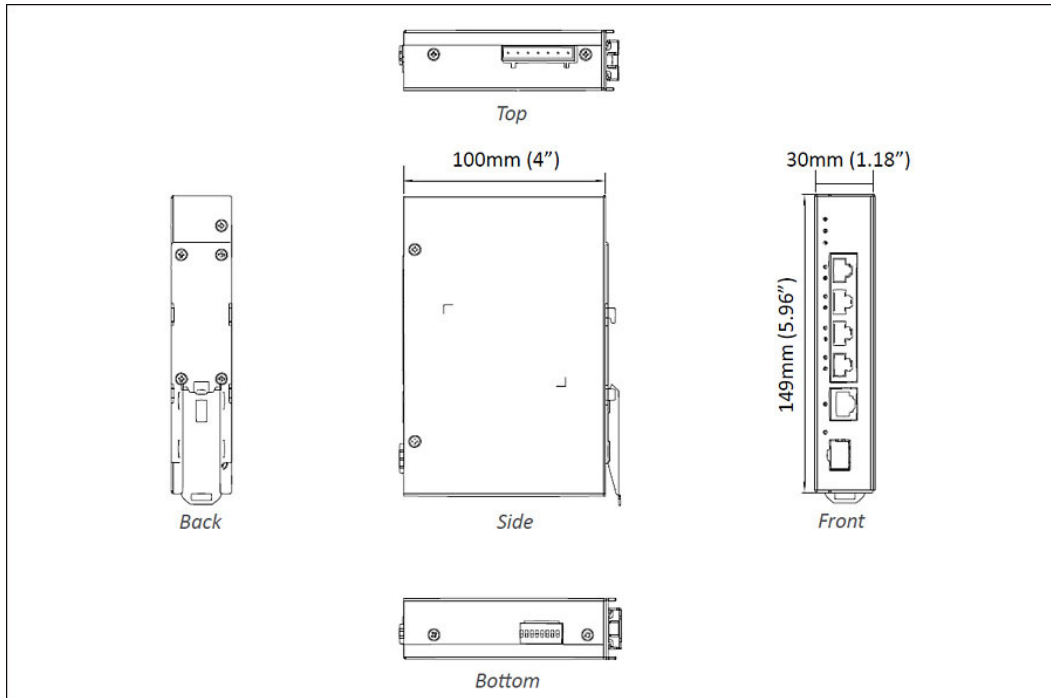

## 訂購型號

### + Model

EX45905	5-port 10/100/1000BASE-T (4 x PoE) Gigabit Hardened Unmanaged Ethernet Switch
EX45915-V	5-port 10/100/1000BASE-T (4 x PoE) +1-port 1000BASE-X Gigabit Hardened Unmanaged Ethernet Switch

\* DIN-Rail mounting kit included.

### + Optional Accessories

NDR-240-48	240W/5A DIN-Rail 48VDC Industrial Power Supply
------------	--

