

INJ30AT

Hardened Gigabit PoE Injector



Highlights

+ High-Power PoE (Power over Ethernet)

Provides PoE functionality to a non-PoE network
Up to 30W output for various security applications such as PTZ cameras
Backward compatible with 802.3af devices

+ Hardened-Grade for Non-Ventilated & Harsh Environments

Wide operating temperature range -40 to 75°C (-40 to 167°F)
Fanless operation
High impact, thermal shock, and electrical noise resistance

+ Support

Complimentary Technical Support
In-person training and free online training courses available
Limited Lifetime Warranty

Overview

EtherWAN's INJ30AT is a compact hardened DIN-rail mounted PoE injector. Providing up to 30W power output, the INJ30AT provides the solution required to integrate remote PoE devices such as IP cameras and other network devices into non-PoE networks for reliable operation even in harsh environments.

EtherWAN — "When Connectivity is Crucial."

Specifications

+ Interface

Ethernet
1 x 10/100/1000BASE-T(X), connection to network
1 x 10/100/1000BASE-T(X), PoE connection to device

LED Indicators
Power detected: Power 1, Power 2
PoE: On (Active), Off (Idle)

+ Technology

Standards
IEEE 802.3 10BASE-T
IEEE 802.3u 100BASE-TX/100BASE-FX
IEEE 802.3ab 1000BASE-T
IEEE 802.3af PoE
IEEE 802.3at PoE+

+ Power

Input
24-56VDC Redundant (Terminal block)

Power Consumption
1W max @ 48VDC, without PoE

PoE Power Output
30W @ 56VDC input

Protection
Reverse Polarity Protection
Current Overload Protection

+ Physical

Casing Material
Aluminum

IP Rating
IP30

Dimensions
1.26" x 3.21" x 4.07"(W x D x H)
32 x 81.5 x 103.5mm

Weight
1.5lbs (0.68kg)

Installation Type
DIN-rail or wall mounting

+ Environmental

Operating Temp.
-40 to 167°F (-40 to 75°C)

Storage Temp.
-49 to 185°F (-40 to 85°C)

Relative Humidity
5% to 95% (non-condensing)

MTBF
>500,000 hours@50°C

+ Regulatory

ISO
Manufactured in ISO-9001 facility

EMI
FCC Part 15B Class A
EN 55032
EN 55024

EMS
EN 61000-4-2 (ESD)
EN 61000-4-4 (Burst)
EN 61000-4-5 (Surge)

Safety
UL 60950-1

Vibration
IEC 60068-2-6

Shock
IEC 60068-2-27

Free Fall
EN 60068-2-32

+ Warranty

Length
Limited Lifetime

Details
www.etherwan.com/support/warranty-policy


+ What's Included

Device
Injector

Installation
Mounting brackets, screws, 4-pin terminal block

Documentation
Quick install guide

Dimensions

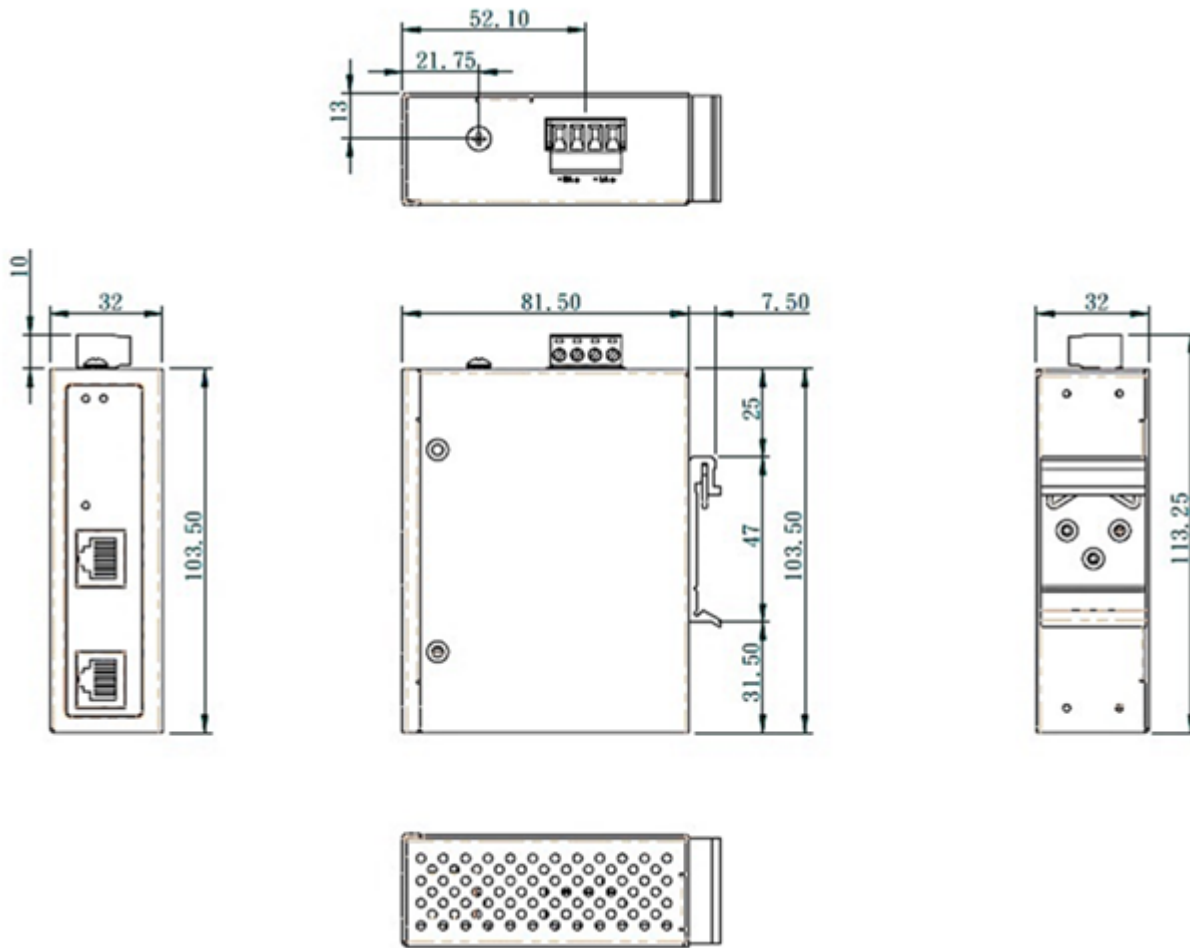

Ordering Info

+ Model

INJ30AT 10/100/1000BASE-T PoE Injector, 30W 802.3at

+ Accessories

DIN-Rail Power Supplies www.etherwan.com/products/din-rail-power-supply

