EMC400 シリーズ

4 台収納可能なメディアコンバータ シャーシ



概要

EMC400、4 スロット DIN -レール マウント シャーシは中断の許されない重要なネットワーク構築に柔軟性、信頼性と冗長性を提供します。EtherWAN のメディアコンバータとエクステンダを一つのシャーシに収納できる設計で、お客様のネットワーク構築ニーズに柔軟に対応可能です。独立した電源を二重化し、単独電源装置より高い信頼性を実現しました。ホットスワップ設計を導入し、メディアコンバータとエクステンダの追加設置の際に現存のネットワークに干渉しません。

さらに、サージ保護を実装し、シャーシ内に設置された機器間の電流の独立性を保ちます。 堅牢なメタル筐体 、DIN-レールマウント設計、ホットスワップ技術を用いた EMC400 は、異なるネットワークの接続に理想的なソリューションを提供し、イーサネットの限界以上のパフォーマンスを実現します。

EtherWAN — "When Connectivity is Crucial."

特長

ホットスワップ技術

メディアコンバータ、エクステンダ設置時にホットスワップ対応。

4 スロット DIN-レール シャーシ

二重化ターミナルブロック電源入力。

EtherWAN のエクステンダとメディアコンバータに対応

サポート型番 EL2321, EL2211, EL2315, EM1000/EM2000, EM1000S/EM2000S, EM1020, EM120, EL100/EL110, EL200/EL210 と ED3501 シリーズ。

仕様

電源

電源電圧

EMC400 chassis input: 12VDC

配線

Minimum cable AWG: 16AWG

消費電力

Max. 19W@Full installation, depending on installed devices

保護

過電流保護

物理仕様

筐体

Steel Electrogalvanized ColdRolled Coil (SECC)

寸法

130 x 164 x 92.1mm (W x D x H)
(5.12" x 6.46" x 3.63")

重量

1.37kg (3.02lb)

取付方法

DIN-Rail

インターフェース

LED 表示

Power 1: On, power input 1 is connected
Off, power input 1 is disconnected

Power 2: On, power input 2 is connected
Off, power input 2 is disconnected

環境条件

使用温度範囲

0 to 45°C (32 to 113°F)

保存温度範囲

-20 to 70°C (-4 to 158°F)

使用湿度範囲

5% to 95% (結露なきこと)

信頼性認証

ISO

Manufactured in an ISO 9001 facility

EMI

FCC Part 15B, Class A

EN 61000-6-4

EN 55022

EMS

EN 61000-6-2

EN 61000-4-2 (ESD Standards)

EN 61000-4-3 (Radiated RFI Standards)

EN 61000-4-4 (Burst Standards)

EN 61000-4-5 (Surge Standards)

EN 61000-4-6 (Induced RFI Standards)

EN 61000-4-8 (Magnetic Field Standards)

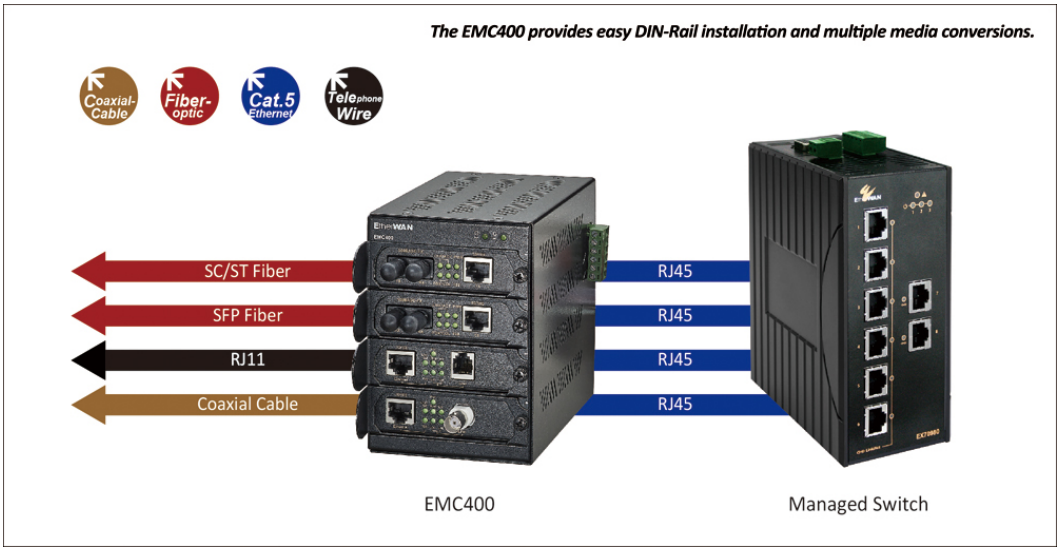
Environmental Test Compliance

IEC 60068-2-6 Fc (Vibration)

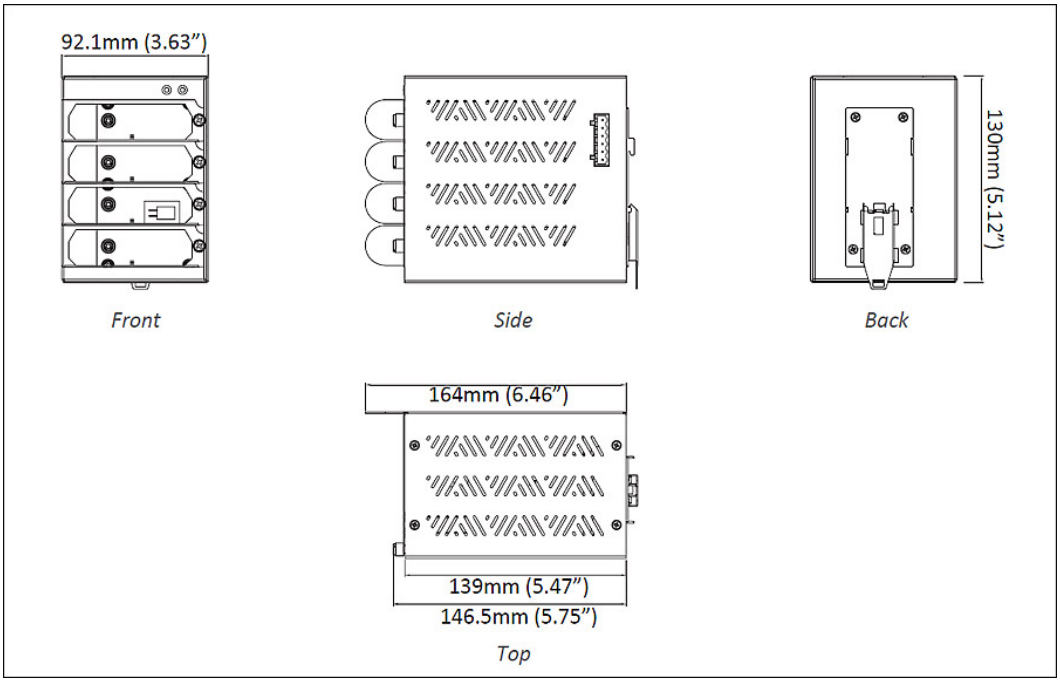
IEC 60068-2-27 Ea (Shock)

IEC 60068-2-32 Ed (Free fall)

応用例


The EMC400 provides easy DIN-Rail installation and multiple media conversions.
Coaxial-Cable
Fiber-optic
Cat.5 Ethernet
Telephone Wire
SC/ST Fiber
SFP Fiber
RJ11
Coaxial Cable
RJ45
RJ45
RJ45
RJ45
EMC400
Managed Switch

寸法図


92.1mm (3.63")
Front
Side
130mm (5.12")
Back
164mm (6.46")
139mm (5.47")
146.5mm (5.75")
Top

製品型番

型番

EMC400-EPWS	4-Slot DIN-Rail Media Converter Chassis with two HDR-30-12 Power Supplies in the Package
EMC400	4-Slot DIN-Rail Media Converter Chassis

* DINレールロ マウントキットを含む

© EtherWAN Systems, Inc. All rights reserved. 20260506
EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.