
GE3100 系列

PCI Express Gigabit 乙太網路介面卡

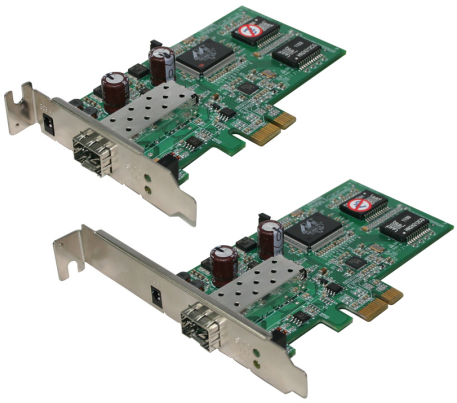

產品特色

» Compliant to IEEE 802.3z 1000BASE-SX/LX/SFP
» Supports PCI Express 1.1
» Supports low profile
» 0 to 45°C operating temperature range
» Supports power down/link down power saving
» Plug-and-Play Support
» Jumbo Frame up to 9K Bytes
» RFC 1157 SNMP v1 compliant
» Preboot Execution Environment (PXE) 2.1
» Supports PCI Message Signaled Interrupt (MSI)
» IEEE 802.1P Layer 2 Priority Encoding
» IEEE 802.1Q VLAN tagging
» Supports ASF (Alert Standard Format) 2.0

產品規格

Technology

Standards

• IEEE 802.3 10BASE-T
• IEEE 802.3u 100BASE-TX
• IEEE 802.3ab 1000BASE-T
• IEEE 802.3z 1000BASE-SX/LX/SFP
• IEEE 802.3Q VLAN tagging
• IEEE 802.3p Priority Encoding
• IEEE 802.3x Full duplex flow control

Jumbo Frame

• 9K bytes

Driver

• Windows Vista, Windows 2003, Windows XP, Windows 2000, Windows 7/8, and Windows 10
• Linux 2.4/2.6/3.x
• MacOS 10.4, 10.5, 10.6, and 10.7 (Intel-based)

Power

Power Consumption

• 3.2W Max.

Mechanical

Dimensions

• Low Profile:
80 x 117.6mm (W x D)
(3.2" x 4.7")
• 117.5 x 117.6mm (W x D)
(4.7" x 4.7")

Weight

• 52g (1.8oz.)

Interface

Ethernet Port

• Gigabit: 1 port

LED Indicators

• LED Connector: Per Unit: Link/Activity, SPD

Environment

Operating Temperature

• 0 to 45°C (32 to 113°F)
Tested @ -10 to 55°C (14 to 131°F)

Storage Temperature

• -20 to 70°C (-4 to 158°F)

Ambient Relative Humidity

• 5% to 95% (non-condensing)

Regulatory Approvals


ISO

• Manufactured in an ISO 9001 facility

Emission Compliance

• FCC Part 15 Class B
• CE VCCI Class B

產品尺寸圖

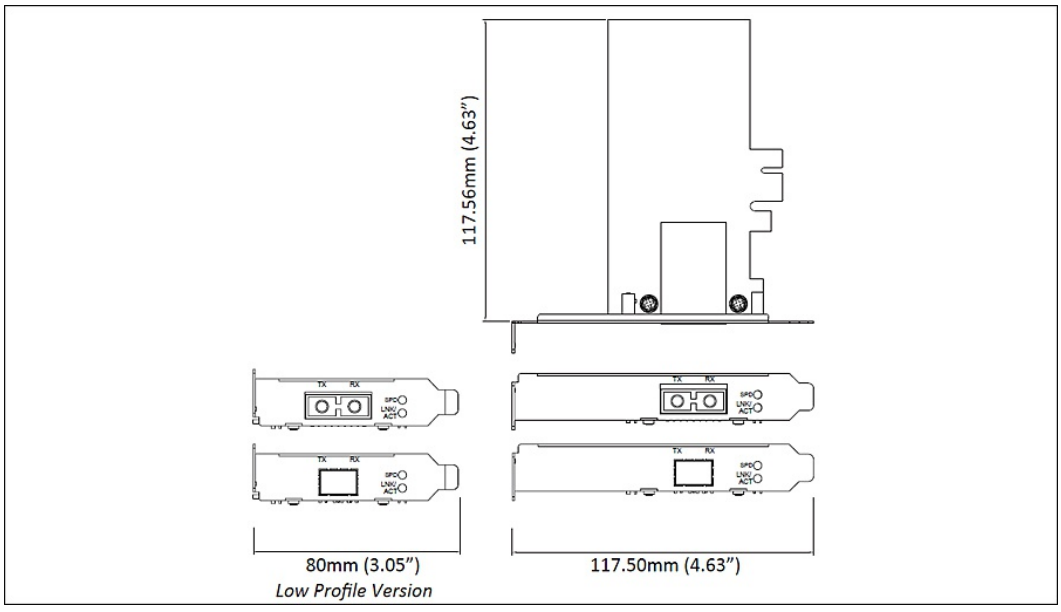

訂購型號

Model

GE3100PSC	1000BASE-SX (SC) Multi-Mode Fiber Gigabit Ethernet Adapter (Low Profile)
GE3100PSFP	1000BASE SFP Gigabit Ethernet Adapter (Low Profile)
GE3100SC	1000BASE-SX (SC) Multi-Mode Fiber Gigabit Ethernet Adapter
GE3100SFP	1000BASE SFP Gigabit Ethernet Adapter
GE3100PTX	10/100/1000BASE-T Gigabit Ethernet Adaptor (Low profile)

* More Gigabit options also available upon request.

© EtherWAN Systems, Inc. All rights reserved. 20220729
EtherWAN is constantly developing and improving products. Specifications are subject to change without notice and without incurring any obligation.